

ZHEJIANG ALWSCI TECHNOLOGIES CO.,LTD.

Office Add.:

B410, No.525 Shixiang Rd, Gongshu District, Hangzhou 310011, Zhejiang P.R.,China

Factory Add.:

Yuexing Technology Innovation Park, No.11 FanRong Road, Binhai New District. Shaoxing 312366. Zheijang P.R. China



Fax.:+86-571-88012781 Tel.:+86-571-88837380 Mail:marketing@alwsci.com Web:www.alwsci.com









BE SIMPLE,

BE PROFESSIONAL







Customize your laboratory solution

As a global supplier of Chromatography Vials, Closures, Septa and Syringe Filters, ALWSCl devotes analytical testing and laboratory consumables to provide high quality, efficient service and favorable price.

Besides, ALWSCI owns 10,000 SQM factory area with 5,000 SQM 100,000 grade cleaning room. To keep stable quality, improve productivity, and avoid any contamination from human interference, ALWSCI has invested in more than 10 automatic production lines presently.

To offer a better solution for sample preparation, full production line is available, including a series of sample vials from 1ML to 2,000ML, Septa from 4mm to 55mm diameter, and Syringe filters made of various membranes.

We would like to draw your attention to Ultra-Clean Septa and EPA Quality Vial Kit. These high quality consumables are mostly used for LC/MS, GC/MS and MS/MS in the environmental, chemical, food and pharmaceutical industries.

We have customers from pharmaceutical, life science, chemistry, technology, food processing industry and so on. Others like Universities, research institutions, government institutions, environmental test institutions, etc.



Sign up for our newsletter:

Do you want to learn more about innovations and developments in laboratory technology faster? Please visit www.alwsci.com

ALWSCI Group

ALWSCI®

- Analysis: Autosampler Vials & Closures.
- Storage: Sample Vials & Closures.

Labfil®

- Filtration: Syringe Filters, Membranes, and etc.

Why choose us?

- Providing a wide range of Lab consumables.
- Variety OEM/ODM services and short delivery time.
- Rich experience with multinational companies.
- Dimensional accuracy for modern robotic autosamplers.
- Help to collect, identify, organize and protect your samples.
- Class 100,000 grade cleaning room, strict QC and R & D department center.
- With environmentally friendly packaging material.
- Cooperating with famous universities for R&D.
- Superior logistics system to offer door to door services.
- Efficient service and competitive price.

Certificate

ALWSCl has obtained ISO9001:2015, ISO13485:2016, ISO14001, ISO45001 and ISO17025 certificates, and has also set high quality standards for itself and is fully responsible for all customers.

(Please contact our sales department before ordering. We will be happy to determine if we can provide the required certificate for your order.)



More

Further products are available upon request!

Hopefully you will find the introduction of our company not only informative, but also interesting.

We would like to thank you for taking time to visit our website.

www.alwsci.com

www.labfil.com www.chinasepta.com

Zhejiang ALWSCl Technologies Co.,Ltd.

ALWSCI TECHNOLOGIES.



FACTORY APPEARANCE





SOLAR PANELS

100,000 Grade Cleaning Room

Product Highlights



Hit Products

- Bonded Closures / 7
- Certified Vials & Closures / 8
- Ultra-Clean series / 9 EPA/TOC Vials & Closures / 10-11
- Barcoded Vials / 12
- 12mL Breath Testing Vial / 13 Laboratory Safety System / 14-19
- Glass Solvent Filter / 20
- 96 Well Plates Sampling System / 21

- Liquid Scintillation Counting Vials / 22 20mL Clear Glass Cuvette Vial / 22 Plastic Vials for PFAS Analysis / 23



Headspace Vials & Closures

- Screw Headspace ND18 / 34 - ND18 Pre-assembled / 34
- Crimp Headspace ND20 / 35
- Crimp Neck ND20 Vial / 35
- 20mm Butyl Septa / 36
- ND20 Closures / 36 - Customized Service / 37



Autosampler Vials & Closures

- Screw Neck ND8 / 25
- 5mm Micro Insert / 25 Screw Neck ND9 / 26-27
- 6mm Micro Insert / 27
- Crimp Neck ND11 / 28
- Snap Neck ND11 / 29 Screw Neck ND13 / 30
- Shell Vial / 30
- High Recovery Vial / 31 COD Test Tube / 32



Sample Vials & Closures

- Sample Vials & Closures / 40-41
- ND24 Sample Vials Pre-assembled / 42
- Sample Vial Kit Package / 43 Tamper-Evident Caps & Glass Bottle / 44-45
- Boston Round Bottle / 46-47
- Wide Mouth Bottle / 48-49
- Soil Sampling Jar / 50 Volumetric Flask / 51



Tools

- GC Septa / 53
- Vial Rack / 53 - Crimper & Decrimper / 53



Welded Syringe Filter

- Nylon / 57 PTFE / 58-59
- PVDF / 60-61 - CA / 62
- PES / 63
- RC / 64



Colorful Syringe Filter

- PVDF / 70-71
- PES / 72



Sterile Syringe Filter

Sterile Welded Syringe Filter

- Nylon/ 75
- PES/ 75 PTFE/ 77
- PVDF/ 77
- Sterile Colorful Syringe Filter Nylon/ 78
- PES/ 78
- PTFE/ 79
- PVDF/80





Membrane Filter

- Membrane Filter / 82
- CA/MCE/PES/Nylon/PVDF/PTFE / 83
- Chemical Compatibility / 84







Bonded Closures



ND9 & ND24 Bonded Closures

- Our bonding machines are fully automated to bond liners to caps using a mechanical bond without any adhesives or chemicals.
- No glue contamination.
- No additional assembly.
- Prevent liner fallout.
- Use with different polypropylene caps.
- Available in 1mm-3mm standard thicknesses; customization is available.
- Ideal for medical devices, diagnostics packaging and specialty chemicals.

> ND9 Closures



> ND24 Closures



1. HIT PRODUCTS

- Bonded Closures / 7
- Certified Vials & Closures / 8
- Ultra-Clean series / 9
- EPA/TOC Vials & Closures / 10-11
- Barcoded Vials / 12
- 12mL Breath Testing Vial / 13
- Laboratory Safety System / 14-19
- Glass Solvent Filter / 20
- ALWSCI well plates for chromatography / 21
- Liquid Scintillation Counting Vials / 22
- Plastic Vials for PFAS Analysis / 23



Ultra-Clean series

Varefied

Certified - ND18 Closures

- While your instruments, sample processing, and experimental methods are constantly improving, your chromatography injection vial cap septa cannot be left behind to ensure that the quality of every part of the experimental process (including sample vials and caps) is successful.
- ALWSCI Varefied® vial cap septa undergo a proprietary cleaning process that greatly reduces background particulates and their potential impact on high-sensitivity chromatography experiments.
- At the same time, the packaging with tear-off strips puts you in a good mood for

Certified Vials & Closures

- Resealable box helps to prevent contamination during use.
- Constructed with PTFE/ Silicone septa for contamination free sampling.
- UltraClean PTFE/ Silicone septa is optimized for gas chromatography and mass spectrometry.

> Certified - 2mL Vials & Closures



2mL Clear Glass 12x32mm Flat Base 9-425 Screw Thread Vial with Label. Blue 9-425 Open Top Ribbed Screw Cap with 9mm Red PTFE/White Silicone Septa 1mm Thick (UltraClean).



2mL Clear Glass 12x32mm Flat Base 9-425 Screw Thread Vial with Label. Blue 9-425 Open Top Ribbed Screw Cap with 9mm Red PTFE/White Silicone Septa 1mm Thick PRE-SLIT (UltraClean).



2mL Amber Glass 12x32mm Flat Base 9-425 Screw Thread Vial with Label. Blue 9-425 Open Top Ribbed Screw Cap with 9mm Red PTFE/White Silicone Septa 1mm Thick (UltraClean).

Vial Cap Septa are pre-assembled together. Blue Kit Packing.100sets/pk



Black 8-425 Open Top Screw Cap

with 8mm Red PTFE/White Silicone Septa 1.5mm Thick (UltraClean).



Black 8-425 Open Top Screw Cap

Septa 1.5mm Thick (UltraClean).



Septa 1mm Thick (UltraClean).





BLUE 11mm Open Top Snap Cap

Red 9-425 Open Top Smooth Screw Cap with 9mm Red PTFE/White Silicone 1mm Thick (UltraClean).

Description

Description

Package

Package

Ref.No.

Description

Package



Blue 9-425 Open Top Ribbed

PTFE/White Silicone Septa 1mm

Screw Cap with 9mm Red

Thick (UltraClean).

C0001019



Blue 9-425 Open Top Ribbed Screw

Cap with 9mm Red PTFE/White

Silicone Septa 1mm Thick PRE-

SLIT (UltraClean).





(UltraClean).

with 8mm Blue PTFE/White Silicone with Red PTFE/White Silicone

100pcs/pk







Blue 9-425 Open Top Ribbed Screw Blue 9-425 Open Top Ribbed Screw Cap with 9mm Blue PTFE/White Silicone Septa 1mm Thick PRE-SLIT (UltraClean).

100pcs/pk

> Certified - ND18 Closures



18mm Silver Color Open Top Metal Cap (8mm hole) with 17.5mm White PTFE/Blue Transparent Description Silicone Septa 1.5mm Thick (UltraClean).



18mm Silver Color Open Top Metal Cap (8mm hole) with 17.5mm Natural PTFE/Blue Transparent Silicone Septa 1.5mm Thick (UltraClean).

Natural PTFE/Blue Transparent Silicone 1.5mm thick Septa (Ultra Clean) (used for 18mm magnetic screw cap).

C0001165

100pcs/pk

> Certified - ND20 Closures

Package

Package



20mm Open Top Aluminum Crimp Cap (10mm 20mm Open Top Aluminum Crimp Cap (10mm hole) with 20mm White PTFE/Blue Silicone Septa hole) with 20mm White PTFE/Blue Transparent Silicone Septa 3mm Thick (UltraClean).

C0000973 20mm Open Top Aluminum Crimp Cap (10mm hole) with 20mm Natural PTFE/Blue Transparent

Silicone Septa 3mm Thick (UltraClean).

100pcs/pk

> Certified - ND24 Closures

3mm Thick (UltraClean).









24-414 White Open Top PP Screw Cap with 22mm Natural PTFE/ White Silicone 3.0mm Thick Septa (EPA Quality).

100pcs/pk

EPA/TOC Vials & Closures

EPA/TOC Vials & Closures



EPA/TOC Vials & Closures

- If you are doing any sampling, testing, or validation, you need to make sure the results were not skewed by a contaminant that may have come from the
- ALWSCI offers a range of certified EPA Screw Vial Convenience Kits which are suitable for all TOC manufacturer's instruments, including Sievers, Shimadzu, OI Analytical, and Teledyne-Tekmar.
- All Certified to contain <10ppb Carbon, giving you confidence in the quality of your TOC measurements.
- Teflon lined caps and protective dust covers.
- Superior vial-to-vial consistency.
- Capped with teflon lined silicone septa and dust cover.
- Widely apply to air, water, soil analysis test, also pesticide residue.

> 20mL EPA/TOC



Ref.No.

Description

Package






C0000413 20mL 27.5x57mm Clear Glass EPA /TOC Vial 24-414 White Open Top PP Screw Cap with 22mm Natural PTFE/White Silicone 3.0mm thick Septa (EPA Quality).



20mL 27.5x57mm Amber Glass EPA/TOC Vial 24-414 White Open Top PP Screw Cap with 22mm Natural PTFE/White Silicone 3.0mm thick Septa (EPA Quality).



20mL 27.5x57mm Clear Glass EPA/TOC Vial 24-414 White Open Top PP Screw Cap with 22mm Natural PTFE/White Silicone 3.0mm thick Septa (EPA Quality) and Dust Cover.



Vial + Cap + Septa are pre-assembled together. 100pcs/pk.

> 40mL EPA/TOC



Ref.No.

Package



40mL 27.5x95mm Clear Glass

Top PP Screw Cap with 22mm


Natural PTFE/White Silicone

EPA/TOC Vial 24-414 White Open

3.0mm thick Septa (EPA Quality).







Vial + Cap + Septa are pre-assembled together. 72pcs/pk.



and Dust Cover.



40mL 27.5x95mm Clear Glass EPA/TOC Vial 24-414 White Open Top PP Screw Cap with 22mm Natural PTFE/White Silicone 3.0mm thick Septa (EPA Quality)



> 60mL EPA/TOC



> 40mL Pre-cleaned and Certified



Pre-cleaned and Certified (TOC<10 ppb)

Parameter analysis

Analysis						
Total organic carbon (TOC)						

limited <10ug/L(10ppb) Number of detected <10ug/L(10ppb)

EPA/TOC Vials & Closures

This "Certificate of Conformity" represents ALWSCI's pre-cleaned and certified product that is prepared in accordance with ALWSCI's Perormance. Based on standards and meets or exceeds the Total Organic Carbon (TOC) analytical product specifications for each lot number. Analyze are performed under controlled conditions using a calibrated Sievers TOC analyzer to confirm that the identified products and associated batches meet the following acceptance criteria.



Barcoded Vials

Barcoded Vials




Barcoded Vials

- No more smudges no more smears, Better data for your peers.
- One vial, one code. No duplicate barcodeds. You can track every individual
- Each barcoded scanned for 100% readability.
- Customized service is workable as request, like 1D, 2D to choose.
- Will not contaminate the samples in anyway.
- The printings on vials are fired on the glass, which makes the printings.
- Can resist all common solutions in laboratories.
- Barcoded vials are annealed at over 500°C, perfect with printing durability and vial inner cleanness.

Barcode Label Templates and Overview

- You only need to provide the barcode content that you want to print on the sample bottle according to your system and tell us whether you want to print a barcode or QR code.
- You need to provide us with the following barcode number, like below:

2010111					
Sample ID(Barcode Information)					
AS20057					
AS20057					
AS20057					



Ref.No.	C0001561	C0001562	C0001563	C0001564
Description	Barcoded 12x32mm 2mL Clear Glass Flat Base 9-425 Screw Thread with Label.	QR Coded 12x32mm 2mL Clear Glass Flat Base 9-425 Screw Thread Vial with Label.	Barcoded 12x32mm 2mL Amber Glass Flat Base 9-425 Screw Thread Vial with Label.	QR Coded 12x32mm 2mL Amber Glass Flat Base 9-425 Screw Thread Vial with Label.
Package	100pcs/pk		i	
Ref.No.	o. C0001713 C0001714		C0002260	C0001766
Description	Description Barcoded 15x45mm 4mL Clear Glass Flat Base 13-425 Screw Thread Vial. Barcoded 15x45mm 4mL Amber Glass Flat Base 13-425 Screw Thread Vial.		Barcoded 17x60mm 8mL Clear Glass Sample Vial 15-425 Screw Thread.	Barcoded 22×72.5mm 16mL Amber Glass Sample Vial 18-400 Screw Thread.
Package		100pcs/pk		
Ref.No.	C0002528	C0002567	C0002541	C0002542
Description	Description Barcoded 27.5×57mm 20mL Clear Glass Sample Vial 24-414 Screw Thread. Barcoded 27.5×140mm 60mL Clear Glass Sample Vial 24-414 Screw Thread.		Barcoded 12x32mm 2mL Clear Glass Flat Base 9-425 Screw Thread Vial with Label on Side and QR code on Bottom.	Barcoded 15x45mm 4mL Clear Glass Flat Base 13-425 Screw Thread Vial with QR code on Bottom.
Package	100pcs/pk			

12mL Breath Testing Vial



12ML Breath Testing Vial

- Suitable for various gas detection instruments, and it has good sealing performance and no impurities which can effectively prevent the movement of the cap during the heating and sampling process. At the same time, it is also suitable for various types of breath tests and the preservation of gases to be measured by various breath
- Silicone coating gives people a clear instructions without interfering with the
- The material of vial is borosilicate glass and cap is high-quality polypropylene.
- Cap color can be customized accordingly.

> Screw Top Type









12ML Breath Testing Vial

Ref.No.	C0002011	C0002012	C0002013
Description	12mL 15.5x101mm Breath Sampling Vial. White Open Top Screw Cap with Butyl Septa. Flat Bottom. Non Coated Vial. Non Evacuated.	12mL 15.5x101mm Breath Sampling Vial. White Open Top Screw Cap with Butyl Septa. Flat Bottom. Coated Vial. Non Evacuated.	12mL 15.5x101mm Breath Sampling Vial. White Open Top Screw Cap with Butyl Septa. Flat Bottom. Coated Vial. Evacuated.
Ref.No.	C0002072	C0002079	C0002083
Description	12mL 15.5x101mm Breath Sampling Vial. Red Open Top Screw Cap with Butyl Septa. Flat Bottom. Non Coated Vial. Non Evacuated.	12mL 15.5x101mm Breath Sampling Vial. Green Open Top Screw Cap with Butyl Septa. Flat Bottom. Coated Vial. Non Evacuated.	12mL 15.5x101mm Breath Sampling Vial. Blue Open Top Screw Cap with Butyl Septa. Flat Bottom. Coated Vial. Evacuated.
Package	Vial+C	ap+Septa are pre-assembled together. Kit Packing.	100pcs/pk

> Crimp Top









Ref.No.	C0002269	C0002270		
Description	12mL 15.5x98mm Crimp Breath Sampling Vial. Open Top Aluminum Crimp Cap with Butyl Septa. Rounded Bottom. Non Coated Vial. Evacuated.	12mL 15.5x98mm Crimp Breath Sampling Vial. Open Top Aluminum Crimp Cap with Butyl Septa. Rounded Bottom. Coated Vial. Evacuated.		
Package	Vial+Cap+Septa are pre-assembled together. Kit Packing. 100pcs/pk			

2 Autosample Vials & Closu

Laboratory Safety System

GL45 Safety Caps

Laboratory Safety System



GL45 Safety Caps

- ALWSCI laboratory products are designed by ALWSCI to provide exceptional ease of use and reliable protection in the laboratory, saving chromatographers time and rework while supporting excellent chromatography results. Protect your laboratory environment. Security systems provide protection and ensure safer laboratory work.
- ALWSCI Hard Hats are engineered to help you maintain your solvent-free laboratory and feature a special time bar on the air valve to show when the air valve needs to be replaced. Just pull out the old valve and replace it with a new one every six months.
- ALWSCI offers a full range of products to support laboratory safety, including solvent caps for different sized solvent bottles, accessories and more.

The time strip has a lifetime of 6 months and will alert you when to replace the air valve.

How to activate the time strip?

A simple press with the finger on the strip starts the clock for a time of 6 months.

Note: The time strip is a visual reminder. It cannot provide real online information regarding the saturation and contamination of the valve.



Steps in detail:

- 1. Install the Air Valve at a free port on the Safety Caps and activate the time strip.
- 2. Guide the solvent tube through the proper fitting on the Safety Caps (std.3.2 mm id) and push the open end through a free port on the Safety Caps.
- 3. Attach the solvent inlet filter onto the open end of the tubing.
- 4. Screw the Safety Caps on top of the solvent bottle.
- 5. Adjust the height of the solvent inlet filter within the bottle.
- 6. Finally tighten the fitting by turning it clockwise.







Package









Air Valve Working Information





100pcs/pk.

www.alwsci.com

Laboratory Safety System



Safety Caps

- The Safety Caps can protect your laboratory environment.
- The safety system offers protection and ensures safer work in lab.
- The integrated PTFE layer captures dust and other contaminants from the air.
- The ergonomic design allows an easy and tool free replacement of solvent due to freely rotatable cap-inserts and finger tight fittings that avoid twisted tubes during container exchange.

10-32unf PEEK Blind Plug Natural Color.

Purple GL40 Safety Cap with 3

1/4"-28 fitting for 1/8" tubing.

ports Including 1x Air Valve and 2 x



1/4-28 PEEK Fitting for 1/8" OD Tubing

1set/pk

1/4"-28 fitting for 1/8" tubing.

Natural Color.

Grey GL38 Safety Cap with 2 ports Grey GL38 Safety Cap with 3 ports Purple GL40 Safety Cap with 2

Description Including 1x Air Valve and 1 x 1/4" - Including 1x Air Valve and 2 x 1/4" - ports Including 1x Air Valve and 1 x

28 fitting for 1/8" tubing.

GL45 Reagent Bottle



GL45 Reagent Bottle

- ALWSCI GL45 laboratory reagent bottle, made of high-purity transparent boric acid glass 3.3 tube, screw PP cap and PBT material.
- The bottle wall thickness reaches 3.8mm, far exceeding the international level. The product wall thickness uniformity is more consistent, and the wall thickness deviatim does not exceed 0.1 mm. The bottle body has better air permeability and better aesthetics.
- The Reagent Bottle has high strength, stable chemical properties, and is suitable for long-term storage, transportation and storage of media, biologicals and other liquid solutions for lab, experiment, chemistry, scientific.

Reagent bottles can be used at -198°C to +500°C and pouring rings with screw-on PP caps can be used at +140°C.

















Blue GL45 Closed Top PP Cap.

Red GL45 Closed Top PBT Cap.

Red GL45 Closed Top PBT Cap with Natural PTFE/White Silicone Septa 3mm Thick.

Package

1pc/pk



10-32unf PEEK Fitting for 1/16 OD Tubing

Natural Color

28 fitting for 1/8" tubing.

Description

Package

Gl38 GL40 Safety Cap

Ref.No.

Package

Solvent Waste System

Laboratory Safety System



Solvent Waste System

- Using the S60 thread interface, it perfectly matches the conventional waste liquid storage container in the laboratory.
- Equipped with pipeline interfaces of various colors, clearly distinguishing different pipelines.
- Activated carbon can actively adsorb and catalyze the decomposition of toxic and harmful gases to ensure that organic gases are completely
- High-quality materials, high temperature resistance, corrosion resistance, and high cost performance.

Purification Feature:

- The exhaust filter purifies the volatile gases before it is released into the environment. Harmful gas emissions are reduced by 80%.
- Collect HPLC waste safely.
- Suitable for many different containers and hose sizes.
- Protect you from vapors from solvents, acids and alkalis.







Ref.No.

Description

Black GL45 Safety Cap with 5 ports Including 3 x fitting 3.2mm and 1 x Blind Plug and 1 x connection for activated carbon exhaust filter.



Black GL45 Safety Cap with 4 ports Including 2 x fitting 3.2mm and 1 x Blind Plug and 1 x connection for activated carbon exhaust filter.



Black GL45 Safety Cap with 3 ports Including 1 x fitting 3.2mm and 1 x Blind Plug and 1 x connection for activated carbon exhaust filter.

Package



Ref.No. Black S60 Solvent Safety Waste Cap with 2 Description ports Including 2 x fitting 3.2mm.

Activated Carbon Exhaust Filter

1pc/pk



25L Waste Liquidal Storage Container.

1pc/ctn

GL80 Reagent Bottle



GL80 Reagent Bottle

- Made of clear laboratory glass bottle molded 3.3 borosilicate.
- Wide mouth reagent bottle uniform thickness, good sealing, glossy surface, stable not mildew, GL80 screw cap.
- For storage and transfer of substances.
- ALWSCI GL80 safety pp cap with 4 ports including 4 x fitting 3.2mm.
- Fully compatible with all the GL80 threads and therefore highly versatile.

Key advantages:

- No evaporation of hazardous gases
- No contamination of solvents
- No crimping of connection tubing
- Easy container exchange
- No air intake (HPLC)
- Cost efficiency (save expensive solvents by avoiding evaporation)











Laboratory Safety System



Package

Glass Solvent Filter 96 Well Plates Sampling System

Glass Solvent Filter




Glass Solvent Filter


- -Glass solvent filter is mainly used in high-performance liquid chromatography flow phase filtration, particulate material analysis and microbial pollution detection, and it is one of the standing equipment in the chemical laboratories.
- Using the glass solvent filter in the process of chromatographic analysis can effectively filter out the impurities that affect the life and detection accuracy of the chromatography column, and play the role of protecting the chromatography column and the chromatograph.
- The plug-type design is adopted to ensure the sealing and also effectively avoid the difficult separation problem of the filter head and the bottle mouth after vacuuming.

Key Features:

- It is widely used almost able to meet all the filtration needs of the laboratory.
- Large effective filtration area, save the cost of filter membrane use, and improve the filtration effciency.
- Good pressure resistance, which can be used for high temperature and high pressure.
- The fixed clip is made of aluminum alloy treated by the anode process, and will not be damaged by corrosion.
- The bottle is made of high borosilicate glass tubing, which is smooth and transparent, no bubbles and wall thickness uniformity.




Compare Features

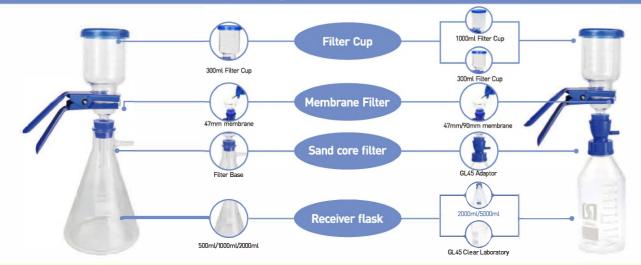

Ref.No.	C0002058	C0002059	C0002112	C0002113
	500mL Glass solvent filter with ALWSCI Logo.	1000mL Glass solvent filter with ALWSCI Logo.	500mL Glass Solvent Filter with Filtration Adaptor for GL45 Bottle with ALWSCI Logo.	1000mL Glass Solvent Filter with Filtration Adaptor for GL45 Bottle with ALWSCI Logo.
Package		1set/ctn		
Ref.No.	C0002164	C0002171	C0002515	C0002516
	2000mL Glass solvent filter with ALWSCI Logo.	2000mL Glass Solvent Filter with Filtration Adaptor for GL45 Bottle with ALWSCI Logo.	90mm Glass Solvent Filter with ALWSCI Logo Includes 1000mL/ 90mm Glass Filter Holder with 2000mL Receiver Flask and	90mm Glass Solvent Filter with ALWSCI Logo Includes 1000mL/ 90mm Glass Filter Holder with 5000mL Receiver Flask and

96 Well Plates Sampling System




96 Well Plates Sampling System

- This 96 Well Plates Samping System provides the analyst with 96 completely inert chambers and reduces the risk of cross-contamination from well to well when removing the cover.
- SBS/ANSI standard footprint assures compatibility with all well plates capable prep stations and chromatography autosamplers.
- It offers secure sample containment throughout the analytical sample run.
- We offer two mats, an EVA mat that stabilizes the sample and is pierced by most instruments and a silicone mat that has the resealing qualities of standard autosampler vial septa.

96 Well Plates Sampling System

- Individual glass vials with closures that provide a resistant surface to the organic eluent, thus maintaining sample integrity.
- Prepare and analyze samples in less time with less lab bench space and storage space required per sample.
- ALWSCI has assembled the Glass Insert with 96 well plate, which provide a more convenient way for your chromatography.

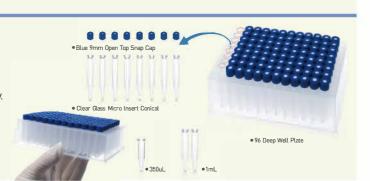



Silicone Sealing Mat

- 96 Well Silicone mats are designed for 96-well storage and assay plates.
- Produced from the highest quality research grade silicone to resist coring and tearing, reducing the risk of mat particulate entering the well.
- Usually used in high-throughput applications or those involving accessing the sample through the cover multiple times.



EVA Capmat

- This EVA mat is pierceable and suitable for archiving and ultra-cold stor-
- Efficient transport of many samples in a single plate.
- SBS/ANSI standard footprint assures compatibility with all well plates capable prep stations and chromatography autosamplers.



C0002464 Ref.No. C0002442 Clear 96 Round Well Silicone Sealing Mat One 96 Deep Well Plate with 350uL 6x32mm One 96 Deep Well Plate with 1mL 7.6x46mm Clear Glass Micro Insert Conical. Blue 9mm for 2mL Deep Well Plate. Clear Glass Micro Insert Conical. Blue 9mm Description Open Top Snap Cap with Red PTFE/White Silicone Septa 1.8mm Thick(UltraClean). Silicone Septa 1.8mm Thick(UltraClean). Pre-assembled. Pre-assembled. Package

www.alwsci.com

Liquid Scintillation Counting Vials



Liquid Scintillation Counting Vials

- Manufactured from low potassium glass tubing. The uniform wall thickness contributes to excellent counting reproducibility.
- Suitable for use with aggressive reagents and tissue solubilizers.
- Glass material: Made of low extractable borosilicate glass, it has better temperature resistance and can carry out various ultra-high temperature experiments.
- HDPE material: Made from high density polyethylene with lightweight walls for increased counting efficiency, economical choice.
- Select cap and liner material for your application.









Ref.No.	Description	Package
C0002216	20mL Clear Glass Scintillation Vial 27.5x57.5mm 22-400 Screw Thread.	144pcs/pk
C0002252	20mL Clear Glass Scintillation Vial 27.5x57.5mm with 22-400 White Closed Top PP Cap and PE Liner. Vial + Cap + Septa are pre-assembled together. Packed with dividers.	100pcs/pk
C0002363	20mL Clear Glass Scintillation Vial 27.5x57.5mm with 22-400 White Closed Top PP Cap and Silver Aluminum Foil PE Liner 1.5mm Thick. Vial + Cap + Septa are pre-assembled together. Packed with dividers.	100pcs/pk
C0002391	20mL Clear Glass Scintillation Vial 27.5x57.5mm with 22-400 White Closed Top PP Cap and Silver Aluminum Foil PE Liner 1.5mm Thick. Vial + Cap + Septa are pre-assembled together. Packed with dividers and cover.	100pcs/pk
C0002444	7mL Clear Glass Scintillation Vial 17×54mm with 15-425 White Closed Top PP Cap and Silver Aluminum Foil PE Liner 1.5mm Thick. Vial + Cap + Septa are pre-assembled together. Packed with dividers.	200pcs/pk
C0002501	7mL Clear Glass Scintillation Vial 17x54mm with 15-425 White Closed Top PP Cap and Silver Aluminum Foil PE Liner 1.5mm Thick. Vial + Cap + Septa are pre-assembled together. Packed with dividers and cover.	200pcs/pk
C0002602	20mL HDPE Scintillation Vial 27.5x57.5mm with 22-400 White Closed Top PP Cap and Silver Aluminum Foil PE Liner 1.5mm Thick. Vial + Cap + Septa are pre-assembled together. Packed with dividers.	100pcs/pk
C0002697	20mL Clear Glass Scintillation Vial 27.5x57.5mm 22-400 Screw Thread. Packed with dividers.	100pcs/pk

> 20mL Cuvette Vial



Ref.No.	C0002568	C0002701		
Description	20mL Clear Glass Cuvette Vial 25x60mm 22-400 Screw Thread. 3.3 Borosilicate. Packed with dividers.	20mL Clear Glass Cuvette Vial 25x60mm 22-400 Screw Thread with Label. 3.3 Borosilicate. Packed with dividers.		
Package	100pcs/pk			



> Plastic Vials for PFAS Analysis

- Microvials for an optimzied microsampling with 0.3mL, 0.7mL, 0.75mL, 2mL.
- Ideal for Ion Chromatography, Capillary Electrophoresis, Atomic Absorption, pH sensitive samples, sodium, heavy metals analysis and aqueous samples.
- Monitoring the presence of PFAS in the environment and consumer products has become increasingly important.
- Various methods for testing PFAS have been developed, ranging from laboratory analysis to field test kits.

2mL 9-425 Wide Opening PP Screw 2mL 9-425 Wide Opening PP Screw

Vial with Graduations Amber.

Vial with Graduations Transparent.

Description

Package

- These methods typically involve advanced analytical techniques such as liquid chromatography and mass spectrometry, which can accurately measure the concentration of PFAS in samples.





Jembrane

www.alwsci.com | 23

Vial with Graduations Transparent.

Blue 9-425 Open Top Ribbed Screw Cap with Polyimide/Red Silicone 1mm Thick. Kit Packing.

Blue 9-425 Open Top Ribbed Screw 2mL 9-425 Wide Opening PP Screw

Cap with 9mm Septa

100pcs/pk

Polyimide/Red Silicone 1mm Thick.

00.1



www.alwsci.com | 25



2. AUTOSAMPLER VIALS & CLOSURES

- Screw Neck ND8 / 25
- 5mm Micro Insert / 25
- Screw Neck ND9 / 26-27
- 6mm Micro Insert / 27
- Crimp Neck ND11 / 28
- Snap Neck ND11 / 29
- Screw Neck ND13 / 30 - Shell Vial / 30
- High Recovery Vial / 31
- COD Test Tube / 32

Screw Neck ND8



Screw Neck ND8

- Standard opening vials for GC and HPLC, used on instruments of Shimadzu, Varian, Gilson etc.
- To meet your micro sampling needs, ALWSCl has a variety of micro volume inserts with capacities and designs that can transform our vials from full-capacity to limited volume with one simple step.
- Standard opening requires Micro-insert with a diameter of 5mm.
- Micro inserts with flat bottom, conical base, with plastic spring are available.
- The conical design permits complete sample removal.

> Screw Neck ND8



> 8mm Septa

Septa			60		
Ref.No.	C0000436	C0000321	C0000964	C0000445	C0000999
Description		8-425 Red PTFE/White Silicone Septa 1.5mm Thick.	8-425 Red PTFE/White Silicone Septa 1.5mm Thick PRE-SLIT.	8-425 White PTFE/Red Silicone Septa 1.5mm Thick.	8-425 Blue PTFE/White Silicone Septa 1.5mm Thick.
Package	e 100pcs/pk				

> ND8 Closures

	7.05 di C5						
Closures		8 80		800			
Ref.No.	C0000931	C0000957	C0000133	C0000409			
Description	Black 8-425 Open Top Screw Cap. White 8-425 Open Top Screw Cap.		ap. Black 8-425 Open Top Screw Cap with 8mm Red PTFE/White 8mm White PTFE/Red Sili Silicone Septa 1.5mm Thick. Septa 1.5mm Thick.				
Package	100pcs/pk						

> 5mm Micro Insert





Screw Neck ND9 Screw Neck ND9

Screw Neck ND9



Screw Neck ND9

- Wide opening 9-425 vials can be used on all common autosamplers, perfectly compatible with Agilent, Thermo Scientific, Waters, Varian, etc.
- Vials with integrated micro-insert are available in clear and amber glass.
- Wide opening 12x32mm, Polypropylene vials have chemical resistance, which are used for atomic absorption, water and protein analysis, capillary electrophoresis, ion chromatography applications etc.
- PTFE/silicone slit shape choices are Pre-slit, Y-shape, cross-shape available.
- The polymer spring acts as a shock absorber that protects against breakage if the needle bottoms out.
- Vials and closures are available for packing into a kit to reduce the risk of contamination of vials in laboratories.







> 9mm Septa


9mm Septa				65
Ref.No.	C0000402	C0000329	C0000439	C0000324
		9-425 Blue PTFE/White Silicone Septa 1mm Thick.	9-425 Red PTFE/White Silicone Septa 1mm Thick PRE-SLIT.	
9mm Septa		1	4	0
Ref.No.	C0000431 C0001133		C0000801	C0000460
Description	9-425 Blue PTFE/White Silicone Septa 1mm Thick PRE-SLIT. Septa 1mm Thick PRE-SLIT (Mercedes Shape).		9-425 Red PTFE/White Silicone Septa 1mm Thick PRE-SLIT (Cross Shape).	9-425 Natural PTFE/White Silicone Septa 1mm thick.
Package	100pcs/pk			


> ND9 Closures



> 6mm Micro Insert



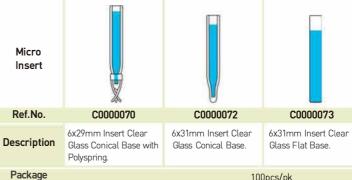



100pcs/pk

www.alwsci.com www.alwsci.com | 27 26

Crimp Neck ND11



Crimp Neck ND11

- The Crimp Vials are used on instruments of Agilent, PerkinElmer, Varian, etc.
- The wide opening crimp cap provides a larger target area for improved autosampler needle accuracy.
- Vials with intergrated Micro-insert are also available in clear and amber glass.
- PTFE/silicone, Natural Rubber/TEF septa, Pre-slit septa to choose.
- The 3-layer septa of Natural Rubber/Red Buty/TEF combines the good physical properties of Natural Rubber(Resealability) with good chemical properties of butyl.(See Customized service page)



> ND11 Closures



Snap Neck ND11



Snap Neck ND11


- The vials are used on instruments of Agilent, CTC, Thermo Scientific, Waters, etc.
- Snap Ring finish eliminates the need for crimping or decapping.
- The integrated Micro-insert are available for in clear and amber glass, micro-inserts can be delivered pre-assembled in vials.
- Snap ring caps are also available in soft material with transparent or blue caps, soft caps are more convenient in handling (push on/off).
- The septa shapes have pre-slit and snow-shape types to choose.



100pcs/pk

> ND11 Closures

Package

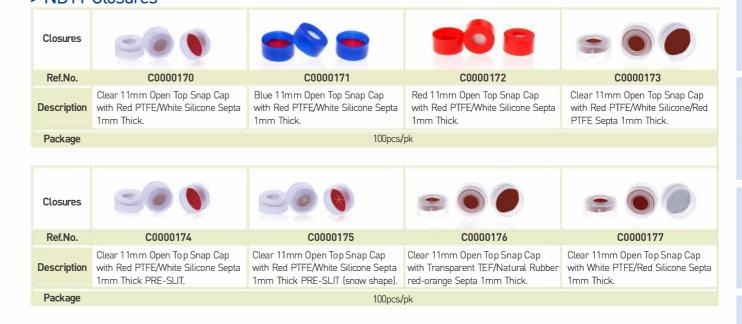

28 | www.alwsci.com

www.alwsci.com 29

0 Memk ilter Screw Neck ND13 **High Recovery Vial**

Screw Neck ND13



Screw Neck ND13

- The vials are used on instruments of Dionex, Shimadzu, WR, Waters etc.
- 4ML vials are widely used in compound storage as well as for Chromatography vials, available as closed open top screw seals with 13-425 thread.

ND13 Screw Neck C0000024 C0000025 Ref.No. 4mL Clear Glass 15x45mm Flat 4mL Clear Glass 15x45mm Flat 4mL Amber Glass 15x45mm Flat 4mL Amber Glass 15x45mm Flat Description Base 13-425 Screw Thread Vial. Base 13-425 Screw Thread Vial with Base 13-425 Screw Thread Vial. Base 13-425 Screw Thread Vial with Label Label. Package 100pcs/pk

> ND13 Septa

	Septa		69			
	Ref.No.	C0000322	C0000408	C0000863	C0000935	C0001134
	Description	13-425 Red PTFE/White Silicone Septa 1mm Thick.	13-425 Red PTFE/White Silicone Septa 1mm Thick Pre-slit.	13-425 White PTFE/Red Silicone Septa 1mm Thick.	13-425 Natural PTFE / White Silicone Septa 1mm Thick.	13-425 Pure PTFE Septa 1.0mm Thick.
F	Package			100pcs/pk		

> ND13 Closures



> Shell Vial

- The vial with soft plug is used on Waters and Shimadzu, the star-shaped plug is for easy penetration.
- The normal size is 8x40mm, and 8x30mm is also available.




High Recovery Vial



High Recovery Vial

- High recovery vials combine large sample capacities with near full sample extraction.
 - Excellent for Compound Storage.
 - Smoothly sloped inner conical surface ensures a high level of solid/liquid recovery.

- Manufactured to close tolerances, so enabling use with automated sample handling systems
- Conical well for maximum sample retrieval-
- Reduce product waste by up to 99%.
- Choice of solid top or open top screw caps for direct access with a syringe.
- Volumes from 2ml to 6ml







www.alwsci.com

COD Test Tube

COD Test Tube



COD Test Tube

For all analytical procedures from cellular analysis to chemical analysis.

- Made from borosilicate glass tube.
- Screw thread test tubes include PP and PC caps with PTFE/silicone septa.
- Design for COD Analysis, also suitable for instruments and test kits.
- The box is food grade material, environmentally friendly.

> Closures



> COD Test Tube

COD Test Tube				
Ref.No.	C0000131	C0001186	C0002569	C0001953
Description	10mL 16x100mm Clear Screw Test Tube. Rounded Bottom. Chinese Tubing.	10mL 16x100mm Clear Screw Test Tube. Rounded Bottom. Schott 5.0.	10mL 16x90mm Clear Screw Test Tube. Flat Bottom.	10mL Clear Screw Test Tube. Rounder Bottom. With write on patch and ALWSCI Printing. 3.3 Borosilicate
Package	250pcs/pk	100pcs/pk	100pcs/pk	250pcs/pk

> Kit Packing





3. HEADSPACE VIALS & CLOSURES

- Screw Headspace ND18 / 34
- ND18 Pre-assembled / 34
- Crimp Headspace ND20 / 35
- Crimp Neck ND20 Vial / 35
- 20mm Butyl Septa / 36
- ND20 Closures / 36
- Customized Service / 37

COODOOAO

20mL Amber Glass 22.5x75mm.

Bottom. Crimp Headspace Vial.

Short Neck.

20mm Beveled Edge. Rounded-Flat

Screw Headspace ND18

Screw Headspace ND18



Screw Headspace ND18

- Pre-assembled vial+closure service is available upon request.
- The magnetic screw caps can be used for headspace as well
- Type of Cap: Magnetic Precision screw cap, Closed Precision





> ND18 Pre-assembled



Crimp Headspace ND20



Crimp Headspace ND20

- GC Headspace technology for the analysis of volatile organic solids and liquid samples after gasification.
- The headspace volume has 6ml,10ml, 20ml clear/amber to choose, the bottom has flat, and rounded-flat.

Crimp Headspace ND20

- Type of Cap:

Aluminum Cap, Bimetal cap, Magnetic crimp cap.

- Type of Liner:

PTFE/silicone, Butyl/PTFE, Butyl, Butyl stopper, Pharma-fix liner.





> Crimp Neck ND20 Vial



www.alwsci.com


ND20 Closures **Customized Service**

> 20mm Butyl Septa

Septa	CO	60	99	99	60	60
Ref.No.	C0000423	C0000407	C0000448	C0000449	C0000450	C0000433
Description	20mm Moulded Pharma-fix-septa Grey PTFE/Butyl 3mm thick.	20mm Moulded Grey PTFE/Butyl Septa one ring 3mm thick.	20mm Moulded Grey Butyl Septa one ring. 3mm thick.	20mm Moulded Grey Butyl Septa both rings. 3mm thick.	20mm Grey PTFE/Butyl without ring. 3mm thick.	20mm Moulded Grey Butyl Injection Stoppe
Package			100	Incs/nk		



Customized Service



Customized Service

- Logo printing, Package Label, Cap Color, Septa Size and Septa Color, all of them can be customized based on huge quantities.
- According to customer needs, various models and specifications of sample vials can be customized, including various septa and packaging.
- Each customized product, from material selection to process, is checked at every level to ensure that the produced products can meet the requirements of all aspects







www.alwsci.com | 37 www.alwsci.com




Sample Vials & Closures

AS40023

Sample Vials & Closures

- Screw vials for storage purpose, vials with different volumes are available.
- Vial Color: Clear, Amber.
- Cap Color: White, Black, Red, Blue, Yellow, Green, etc.
- Septa material: PE, PTFE/Silicone, Silicone only, etc.
- Pre-assembled service is available.

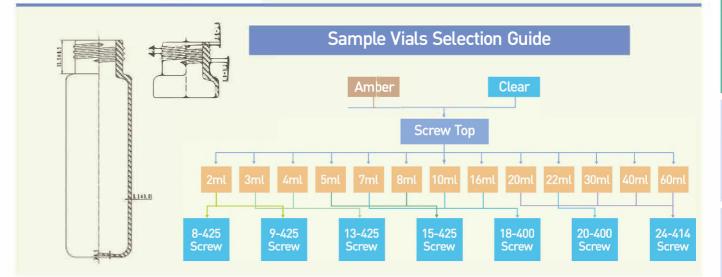

	Sample Vials Application		
Industry	End use application		
Diagnostic	Reagents, blood media and testing, urine analysis.		
Analytical	Chromatography, DNA testing, genome sequencing.		
Pharmaceuticals	Human injectable, oral liquid dosage, dry fill, animal health.		
Cosmetics	Perfume sampling, fragrance product launches, point of purchase, cosmetic counter giveaways.		
Gas/ Oil/ Water	Municipal & private water testing, energy-oil industry, hydraulic fracturing (tracking).		
Nutraceuticals	Dietary supplements, herbal medications.		
Other	Penny promotion & marketing tools, Essential oils, liquid potpourri.		

4. SAMPLE VIALS & CLOSURES

- Sample Vials & Closures / 40-41
- ND24 Sample Vials Pre-assembled / 42
- Sample Vial Kit Package / 43
- Glass Bottle & Tamper-Evident Closures / 44-45
- Boston Round Bottle / 46-47
- Wide Mouth Bottle / 48-49
- Soil Sampling Jar / 50
- Volumetric Flask / 51

Sample Vials & Closures Sample Vials & Closures

Sample Vial & Closures

- Full range of storage vials, both OEM&ODM are available.
- Available in clear and amber glass vials, screw caps with PTFE/silicone septa, PE lined and PE/Alu Foil.
- Extensively in environmental, food, and pharmaceutical applications, suitable for the packaging of various pharmaceutical intermediates, high value-added chemicals, chemical reagents, biological reagents, cosmetics, essences and oils, etc.
- Suitable for long-term storage and transportation of products, has excellent sealing performance.















Ref.No.	Size	Description	Package
C0000006	12x32mm	2mL Clear Glass Flat Base 9-425 Screw Thread Vial.	100pcs/pk
C0000041	12x32mm	2mL Amber Glass Sample Vial 9-425 Screw Thread.	100pcs/pk
C0000042	16x33mm	3mL Clear Glass Sample Vial 13-425 Screw Thread.	100pcs/pk
C0000043	16x33mm	3mL Amber Glass Sample Vial 13-425 Screw Thread.	100pcs/pk
C0000024	15x45mm	4mL Clear Glass Flat Base 13-425 Screw Thread Vial.	100pcs/pk
C0000044	15x45mm	4mL Amber Glass Sample Vial 13-425 Screw Thread.	100pcs/pk
C0000045	18x40mm	5mL Clear Glass Sample Vial 15-425 Screw Thread.	100pcs/pk
C0000929	18x40mm	5mL Amber Glass Sample Vial 15-425 Screw Thread.	100pcs/pk
C0000048	22x40mm	7mL Clear Glass Sample Vial 18-400 Screw Thread.	100pcs/pk
C0000049	22x40mm	7mL Amber Glass Sample Vial 18-400 Screw Thread.	100pcs/pk
C0000051	17x60mm	8mL Clear Glass Sample Vial 15-425 Screw Thread.	100pcs/pk
C0000052	17x60mm	8mL Amber Glass Sample Vial 15-425 Screw Thread.	100pcs/pk
C0000053	22x52mm	10mL Clear Glass Sample Vial 18-400 Screw Thread.	100pcs/pk
C0000054	22x52mm	10mL Amber Glass SampleVial 18-400 Screw Thread.	100pcs/pk
C0001370	19x65mm	12mL Clear Glass Sample Vial 15-425 Screw Thread.	100pcs/pk
C0001371	19x65mm	12mL Amber Glass Sample Vial 15-425 Screw Thread.	100pcs/pk
C0001410	21x70mm	15mL Clear Glass Sample Vial 18-400 Screw Thread.	144pcs/pk
C0001638	21x70mm	15mL Amber Glass Sample Vial 18-400 Screw Thread.	144pcs/pk
C0000055	22x72.5mm	16mL Clear Glass Sample Vial 18-400 Screw Thread.	100pcs/pk
C0000056	22x72.5mm	16mL Amber Glass Sample Vial 18-400 Screw Thread.	100pcs/pk
C0000057	27.5x57mm	20mL Clear Glass Sample Vial 24-414 Screw Thread.	100pcs/pk
C0000058	27.5x57mm	20mL Amber Glass Sample Vial 24-414 Screw Thread.	100pcs/pk
C0001222	23x85mm	22mL Clear Glass Sample Vial 20-400 Screw Thread.	100pcs/pk
C0001223	23x85mm	22mL Amber Glass Sample Vial 20-400 Screw Thread.	100pcs/pk
C0000059	27.5x84mm	30mL Clear Glass Sample Vial 24-414 Screw Thread.	100pcs/pk
C0000060	27.5x84mm	30mL Amber Glass Sample Vial 24-414 Screw Thread.	100pcs/pk
C0000061	27.5x95mm	40mL Clear Glass Sample Vial 24-414 Screw Thread.	100pcs/pk
C0000062	27.5x95mm	40mL Amber Glass Sample Vial 24-414 Screw Thread.	100pcs/pk
C0000065	27.5x140mm	60mL Clear Glass Sample Vial 24-414 Screw Thread.	100pcs/pk
C0000066	27.5x140mm	60mL Amber Glass Sample Vial 24-414 Screw Thread.	100pcs/pk









Sample Vial Kit Package

ND24 Sample Vials Pre-assembled

ND24 Sample Vials Pre-assembled

ND24 Sample Vials Pre-assembled

- If you are doing any sampling, testing, or validation, you need to make sure the results were not skewed by a contaminant that may have come from
- Teflon lined caps and protective dust covers.
- Superior vial-to-vial consistency.







Sample Vial Kit Package

Description





Cap and Silver Aluminum Foil PE Liner 1.5mm Thick.Vial+Cap+Septa

42 | www.alwsci.com

www.alwsci.com | 43

Top PP Cap with 22mm Natural PTFE/White Silicone Septa 1.5mm



Tamper-Evident Closures & Glass Bottle

- Tamper evidence is vital for a number of industries, which helps consumers identify whether a bottle has been opened or not before purchasing.
- PTFE/PE liners with polypropylene caps have excellent sealing characteristics and good chemical resistance to acids, alcohols, alkalis, aqueous products, and
- Kind reminder: tamper-evident cap with different color tamper-evident ring creates a easier identification.
- Come and choose ALWSCl tamper-evident bottles & closures, give customers peace of mind that the products they are buying have not been altered after leaving the manufacturer.

Can be used for Serve As

- Environmental lab samples;
- Analyze lab samples;
- Contaminant-intolerant chemicals;
- High value-added chemicals;
- Acids:
- Reagents, and etc.



> 18mm Tamper-Evident Closures



> 28mm Tamper-Evident Closures



>38mm & 45mm Tamper-Evident Closures



> Glass Bottle







Boston Round Bottle Boston Round Bottle

Ref.No.

Description

Package

Package

Boston Round Bottle



Boston Round Bottle

- A classic bottle shape in the packaging industry, the Boston bottle (also known as a Winchester Bottle), can hold almost liquid or solid.
- Traditionally used for pharmaceutical, chemical and laboratory applications, popular uses break the mold and extend across most markets today.
- The clear design makes it easy to identify the contents, and the amber glass bottles provide UV protection for light sensitive components, assisting with keeping your products maintained when storing.

Features:

- Available in clear and amber.
- Sizes:1/2 oz to 32 oz.
- Strong and heavy bottle.
- Classic Boston Round bottle shape.
- Narrow mouth, ideal for solvents, chemicals and sample storage.



> Boston Round Bottle

Ref.No.	Size	Description	Package
C0002622	25x68mm	15mL(1/2oz) 18-400 Boston Round Clear Glass Bottle.	288pcs/ctn
C0002623	25x68mm	15mL(1/2oz) 18-400 Boston Round Amber Glass Bottle.	288pcs/ctn
C0000116	33x79mm	30mL(1oz) 20-400 Boston Round Clear Glass Bottle.	48pcs/ctn
C0000115	33x79mm	30mL(1oz) 20-400 Boston Round Amber Glass Bottle.	48pcs/ctn
C0000119	39x94mm	60mL(2oz) 20-400 Boston Round Clear Glass Bottle.	48pcs/ctn
C0000118	39x94mm	60mL(2oz) 20-400 Boston Round Amber Glass Bottle.	48pcs/ctn
C0000122	48x112mm	120mL[4oz] 22-400 Boston Round Clear Glass Bottle.	24pcs/ctn
C0000121	48x112mm	120mL(4oz) 22-400 Boston Round Amber Glass Bottle.	24pcs/ctn
C0002624	60x138mm	240mL(8oz) 28-400 Boston Round Clear Glass Bottle.	24pcs/ctn
C0001405	60x138mm	240mL(8oz) 28-400 Boston Round Amber Glass Bottle.	24pcs/ctn
C0002625	75x168mm	480mL(16oz) 28-400 Boston Round Clear Glass Bottle.	12pcs/ctn
C0002626	75x168mm	480mL(16oz) 28-400 Boston Round Amber Glass Bottle.	12pcs/ctn
C0002627	95x208mm	960mL(32oz) 33-400 Boston Round Clear Glass Bottle.	8pcs/ctn
C0000125	95x208mm	960mL(32oz) 33-400 Boston Round Amber Glass Bottle.	8pcs/ctn

Ps: Caps and closures sold separately

> Narrow Mouth Bottle Closures

24mm Black Closed Top PP Cap

with Natural PTFE/White Silicone

30pcs/pk

8pcs/pk

Septa 1.5mm Thick.



24mm Black Closed Top PP Cap

with White PE Septa 1.0mm Thick.

30pcs/pk

Closures			
Ref.No.	C0000231	C0000233	C0000235
Description	33-400 Black Closed Top PP Cap with Natural PTFE/White Silicone Septa 1.5mm Thick.	33-400 Black Closed Top PP Cap with White PTFE Septa 0.5mm Thick.	33-400 Black Closed Top PP Cap with White PE Septa 1.0mm Thick.

8pcs/pk

28-400 Black Closed Top PP Cap

with Natural PTFE/White Silicone

12pcs/pk

Septa 1.5mm Thick.

28-400 Black Closed Top PP Cap

with White PE Septa 1.0mm Thick.

12pcs/pk

8pcs/pk

Wide Mouth Bottle

C0000263

53-400 Black Closed Top PP Cap with White

PE Septa 1.0mm Thick.

Wide Mouth Bottle

Wide Mouth Bottle



Wide Mouth Bottle

- Wide mouth bottles are widely used for packaging of Pharmaceutical intermediate, High value-added chemicals, etc.
- Offer Packaging customized service.

> Wide Mouth Bottle





> Wide Mouth Bottle Closures

C0000261

53-400 Black Closed Top PP Cap with Natural

PTFE/White Silicone Septa 1.5mm Thick.

Ref.No.

Package

· Wide	Modern Bottle Otosares		
Closures			
Ref.No.	C0000255	C0000256	C0000257
Description	38-400 Black Closed Top PP Cap with Natural PTFE/White Silicone Septa 1.5mm Thick.	38-400 Black Closed Top PP Cap with White PTFE Septa 0.5mm Thick.	38-400 Black Closed Top PP Cap with White PE Septa 1.0mm Thick.
Package		24pcs/pk.	
Closures			
Ref.No.	C0000258	C0000259	C0000260
Description	45-400 Black Closed Top PP Cap with Natural PTFE/White Silicone Septa 1.5mm Thick.	45-400 Black Closed Top PP Cap with White PTFE Septa 0.5mm Thick.	45-400 Black Closed Top PP Cap with White PE Septa 1.0mm Thick.
Package		24pcs/pk.	
Closures			

C0000262

12pcs/pk.

53-400 Black Closed Top PP Cap with White

PTFE Septa 0.5mm Thick.

Soil Sampling Jar **Volumertic Flask**

Soil Sampling Jar




Soil Sampling Jar

- The soil sampling jar is mainly used for the sampling and storage of solid soil, sludge or other high-value chemicals. In accordance with EPA method(detection of SVOC or VOC content in water and soil), as well as
- The cap is made of high-quality polypropylene by injection. Different colors are available, such as black, white and etc.
- The materials of liner are Polyethylene, Teflon or Teflon/Silicone, different materials for different requirements.
- The most important-the performance of sealing is perfect, which ensures that the sample is not contaminated by outside air and other components.

Features:

- The particles will separate into layers: the heaviest particles will sink to the bottom.
- This will be the sand layer, next will be the silt layer, and on top will be the clay particles. Any organic matter in the soil will float to the top of the jar.
- The color of the soil itself will tell you about the organic matter content of your soil.
- Lighter soils have less organic matter and darker soils will warm up faster in the spring.







100mL 62×64mm. Wide Mouth

100mL 62×64mm.Wide Mouth Amber Glass Soil Sampling Jar. 56mm Black Closed Top PP Cap with White PE Septa 1.0mm Thick.





60pcs/ctn.



250mL 73×92mm.Wide Mouth Amber Glass Soil Sampling Jar. 70mm Black Closed Top PP Cap with White PE Septa 1.0mm Thick.

60pcs/ctn

Package

Soil Sampling

Ref.No.

Description

Package

Ref.No.

Description

500mL 91×100mm. Wide Mouth

Amber Glass Soil Sampling Jar.

89mm White Closed Top PP Cap

with White PE Septa 1.0mm Thick.

Amber Glass Soil Sampling Jar.

56mm White Closed Top PP Cap

with White PE Septa 1.0mm Thick.

105pcs/ctn.





1000mL 93×187mm.Wide Mouth Amber Glass Soil Sampling Jar. 89mm White Closed Top PP Cap

with White PE Septa 1.0mm Thick.

1000mL 93×187mm. Wide Mouth Amber Glass Soil Sampling Jar. 89mm Black Closed Top PP Cap with White PE Septa 1.0mm Thick.

60pcs/ctn 60pcs/ctn 20pcs/ctn

500mL 91×100mm.Wide Mouth

Amber Glass Soil Sampling Jar.

89mm Black Closed Top PP Cap

with White PE Septa 1.0mm Thick.

Volumertic Flask



Volumetric Flask

- A volumetric flask is an essential tool used in many laboratories for accurately measuring and preparing solutions for a wide range of experiments.
- ALWSCI volumetric flasks are available in a variety of sizes, from 5ML to 2000ML.
- They have narrow necks, flat bottoms, and single graduation marks, making them more precise than other types of flasks.
- Volumetric flasks are made of high-quality materials such as borosilicate glass, making them durable and resistant to temperature changes.
- They are a must-have for any scientist or researcher who needs to prepare high-
- One of the advantages of using a volumetric flask is that they are highly accurate. The volumetric flasks are calibrated to measure the exact volume of liquid. This accuracy is particularly important in
- Another advantage of using volumetric flasks is their ease of use. They are simple and straightforward to use. They are also easy to clean and maintain, which ensures that they remain in good condition for a long time.



acids and alkalis









> Ordering Information

Ref.No.	Capacity	Description	Tol.(+/- ml)	Pack qty.
C0002529	5ml	NS10/13 Clear Glass Volumetric Flask Class A	±0.02	2pcs/pk.
C0002530	5ml	NS10/13 Amber Glass Volumetric Flask Class A	±0.02	2pcs/pk.
C0002531	10ml	NS10/13 Clear Glass Volumetric Flask Class A	±0.02	2pcs/pk.
C0002532	10ml	NS10/13 Amber Glass Volumetric Flask Class A	±0.02	2pcs/pk.
C0002533	20ml	NS12/14 Clear Glass Volumetric Flask Class A	±0.02	2pcs/pk.
C0002534	20ml	NS12/14 Amber Glass Volumetric Flask Class A	±0.02	2pcs/pk.
C0002535	25ml	NS12/14 Clear Glass Volumetric Flask Class A	±0.03	2pcs/pk.
C0002536	25ml	NS12/14 Amber Glass Volumetric Flask Class A	±0.03	2pcs/pk.
C0002537	50mL	NS12/14 Clear Glass Volumetric Flask Class A	±0.05	2pcs/pk.
C0002538	50mL	NS12/14 Amber Glass Volumetric Flask Class A	±0.05	2pcs/pk.
C0002539	100mL	NS12/14 Clear Glass Volumetric Flask Class A	±0.10	2pcs/pk.
C0002540	100mL	NS12/14 Amber Glass Volumetric Flask Class A	±0.10	2pcs/pk.
C0002543	200mL	NS14/23 Clear Glass Volumetric Flask Class A	±0.15	2pcs/pk.
C0002544	200mL	NS14/23 Amber Glass Volumetric Flask Class A	±0.15	2pcs/pk.
C0002545	250mL	NS14/23 Clear Glass Volumetric Flask Class A	±0.15	2pcs/pk.
C0002546	250mL	NS14/23 Amber Glass Volumetric Flask Class A	±0.15	2pcs/pk.
C0002547	500mL	NS19/26 Clear Glass Volumetric Flask Class A	±0.25	2pcs/pk.
C0002548	500mL	NS19/26 Amber Glass Volumetric Flask Class A	±0.25	2pcs/pk.
C0002549	1000mL	NS19/26 Clear Glass Volumetric Flask Class A	±0.40	2pcs/pk.
C0002550	1000mL	NS19/26 Amber Glass Volumetric Flask Class A	±0.40	2pcs/pk.
C0002551	2000mL	NS29/32 Clear Glass Volumetric Flask Class A	±0.60	2pcs/pk.
C0002552	2000mL	NS29/32 Amber Glass Volumetric Flask Class A	±0.60	2pcs/pk.

20pcs/ctn





5. TOOLS

- GC Septa / 53
- Vial Rack / 53
- Crimper & Decrimper / 53

Tools



Tools

- > GC Septa
- GC septa are used in gas chromatography (GC).
- These GC accessories need to introduce the sample without leakage and withstand the high-temperatures of laboratory ovens.
- > Vial Rack
- Easy handling and transportation of sample vials.
- Stable standing position because of solid construction.

> GC Septa

Septa C0000437 Ref.No. Orange High Temp Ultra

up to 320°C.

C0000982 Blue Normal Silicone Low Bleed GC Septa 11x3mm Pre-Pierced. Used Septa 10.8x3mm. Used up to 250°C.

C0001086 Blue Normal Silicone Septa 12.5x3mm. Used up to 250°C.

Orange High Temp Ultra Low Bleed GC Septa 11x3mm. Used up to 320°C.

C0000800

Orange GC Plug Septa, Ultra Low Bleed Septa, Used Up To 320°C. For Shimadzu.

C0000993

50pcs/pk

> Vial Rack

Description

Package

Rack

Ref.No.





Red PP Vial Rack 50 Positions for Orange PP Vial Rack 50 Positions 2mL Vials. With Printing ALWSCI Logo in White.



for 2mL Vials. With Printing ALWSCI 2mL Vials. With Printing ALWSCI Logo in White.



White PP Vial Rack 50 Positions for Logo in Black.

1pcs/pk

Logo in White.



C0001565





C0002286

for 4mL Vials. With Printing ALWSCI



C0000101

Acrylic Vial Rack for 10mL Vials.





Package > Crimper & Decrimper

Description 4mL Vials. With Printing ALWSCI

Logo in White.





C0000266





Ref.No.	
Description	

Crimper for 11mm Aluminum Crimp Cap Stainless Steel

Crimper for 20mm Aluminum Crimp Cap Stainless Steel.

Blue PP Vial Rack 50 Positions for Orange PP Vial Rack 50 Positions

Stainless Steel Crimper for 13mm Flip off Cap.

Stainless Steel Crimper for 20mm Flip off Cap.

C0000267

1pcs/pk

1pcs/pk

Decrimper for 11mm Aluminum Crimp Cap Stainless Steel.

C0000268

Decrimper for 20mm Aluminum Crimp Cap Stainless Steel.

Decrimper for 11mm/20mm Crimp Cap(Plier Type).

C0001385

Package





Welded Syringe Filter




Welded Syringe Filter

- Filtration is achieved by pushing the sample through the membrane with a syringe or other luer-connection device.
- Syringe Filters allow you to control the rate off low, which can be critical with
- It also allows you to filter into nearly any tube, vial, or column that represents the next step in your analysis.
- Filter size: 13mm/25mm/30mm
- Pore size: 0.22um/0.45um

Syringe Filter Selection Guide

- Syringe filters are used for many routine preparation steps in laboratories all over the world.
- They are convenient, ready-to use disposables for removal of particles from solutions and gases.
- Labfil®syringe filters are for a wide range of applications.
- The filters are clean and safe as they are virtually free of leachables and extractables and reliably remove particles and microorganisms without any leakage.
- It is perfect match for the labfil® Luer interface syringe, easy to use, and will not leak to ensure a healthy laboratory environment.






6. WELDED SYRINGE FILTER

- Nylon / 57
- PTFE / 58-59
- PVDF / 60-61
- CA / 62
- -PES / 63
- RC /64

The comparison of Labfil® filter and other brands

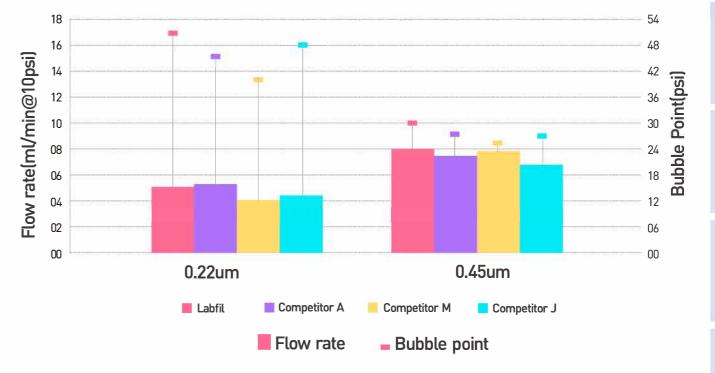

Nylon

Welded Syringe Filter

contaminated

Membrane Selection Guide

Damaged Membrane Intact menbrane Leakage occurs when the membrane sealing If filter membrane damaged or pore size is too big may cause the pollutant to enter. Sample is filtered - non-

- Choosing a membrane filter is based on the size and amount of particulate in the sample, the membrane's chemical compatibility with the sample matrix, and potential interactions (binding) between the membranes and the sample components.

Sample is contaminated

- This table offers general guidelines on membrane characteristics and applications.

Membrane Selection Guide

Membrane Types	Features	Common Uses
Nylon	Good chemical compatibility and very low extractables	General filtration sterilization, HPLC sample prep
Polytetrafluoroethylene (PTFE)	Compatible with strong acids and aggressive solvents	Gas, Air, and Solvent filtration
Polyvinylidene Fluoride (PVDF)	Good flow rate characteristics. Ideal for chromatography applications.	HPLC sample preparation and General filtration

Syringe Filter Diameter	Sample Volume	
13mm	less or equal 10mL	
25mm	less or equal 100mL	
30mm	less or equal 150mL	

Pre-Cut Membrane Diameter	Sample Volume
13mm Pre-Cut Membranes	up to 20mL
25mm Pre-Cut Membranes	up to 100mL
47mm Pre-Cut Membranes	multi-liter

Nylon



- High mechanical and tensile strength.
- Used for most organic solvents and mid-polar liquids.
- Two types in pore size:0.22µm and 0.45µm.
- Three types in filter size:13mm, 25mm and 30mm.

- This Nylon+PP pre-filter provides two times greater throughput than standard
- One of the most commonly used membranes; broad compatibility with aqueous and organic solvents, with stable hydrophilicity, not suitable for highly acidic samples.

Applications:

- Used for most organic solvents mixtures and mid-polar liquids.
- Chemical filtration and Beverage filtration.
- Note: Nylon binds protein, do not use when high protein recovery is desired.

Typical data

Material	Nylon		
Material of housing	рр		
Effective filtration area(cm²)	13mm/1.13cm ²	25mm/4.15cm ²	30mm/5.2cm ²
Pore size(µm)	0.22/0.45		
Process volume(ml)	<10ml(13mm)	<100ml(25mm)	<150ml(30mm)
Maximum Operating Temperature	100°C		
Maximum Operating Pressure(psi)		87psi	













Ref.No.	Size	Description	Package
C0000277	13mm	Nylon Welded Syringe Filter 0.22um with Printing.	100pcs/pk
C0000278	13mm	Nylon Welded Syringe Filter 0.45um with Printing.	100pcs/pk
C0000279	25mm	Nylon Welded Syringe Filter 0.22um with Printing.	100pcs/pk
C0000280	25mm	Nylon Welded Syringe Filter 0.45um with Printing.	100pcs/pk
C0000565	30mm	Nylon Welded Syringe Filter 0.22um with Printing.	100pcs/pk
C0000566	30mm	Nylon Welded Syringe Filter 0.45um with Printing.	100pcs/pk

PTFE Hydrophilic

PTFE Hydrophilic



- For removing particulates, reducing signal-to-noise ratios and maintaining flat baselines.
- Filtering aqueous and organic solutions.
- Two types in pore size:0.22µm and 0.45µm.
- Three types in filter size:13mm, 25mm and 30mm.

Features:

- This PTFE+PP pre-filter provides two times greater throughput than standard filter without pre-filtration.
- Broad chemical compatibility choose for filtering aqueous and organic solutions low protein binding.

Applications:

- Industrial Chromatography.
- Filtration of aqueous solutions as well as organic solvents and chemicals.

Typical data

Material	PTFE Hydrophilic		
Material of housing	рр		
Effective filtration area(cm²)	13mm/1.13cm ² 25mm/4.15cm ² 30mm/5.2cm ²		
Pore size(µm)	0.22/0.45		
Process volume(ml)	<10ml(13mm)	<100ml(25mm)	<150ml(30mm)
Maximum Operating Temperature	130°C		
Maximum Operating Pressure(psi)		87psi	













Ref.No.	Size	Description	Package
C0000281	13mm	PTFE Hydrophilic Welded Syringe Filter 0.22um with Printing.	100pcs/pk
C0000282	13mm	PTFE Hydrophilic Welded Syringe Filter 0.45um with Printing.	100pcs/pk
C0000283	25mm	PTFE Hydrophilic Welded Syringe Filter 0.22um with Printing.	100pcs/pk
C0000284	25mm	PTFE Hydrophilic Welded Syringe Filter 0.45um with Printing.	100pcs/pk
C0000567	30mm	PTFE Hydrophilic Welded Syringe Filter 0.22um with Printing.	100pcs/pk
C0000568	30mm	PTFE Hydrophilic Welded Syringe Filter 0.45um with Printing.	100pcs/pk

PTFE Hydrophobic



- High mechanical and tensile strength.
- Used for most organic solvents and mid-polar liquids.
- Two types in pore size:0.22µm and 0.45µm.
- Three types in filter size:13mm, 25mm and 30mm.

Features

- This PTFE+PP pre-filter provides two times greater throughput than standard filter without pre-filtration.
- Hydrophobic PTFE membrane has great temperature resistance.
- Suitable for Solvents/Gases/Acids/Bases.

Applications:

- Degassing/Clarifying aqueous samples.
- Removal of protein precipitates.
- Strong acid solvent filtration and Alkali solvent filtration.
- Biofuel analysis.

Typical data

Material	PTFE Hydrophobic		
Material of housing	рр		
Effective filtration area(cm²)	13mm/1.13cm ²	25mm/4.15cm ²	30mm/5.2cm ²
Pore size(µm)	0.22/0.45		
Process volume(ml)	<10ml(13mm)	<100ml(25mm)	<150ml(30mm)
Maximum Operating Temperature	130°C		
Maximum Operating Pressure(psi)		87psi	













PTFE Hydrophobic

Ref.No.	Size	Description	Package
C0000297	13mm	PTFE Hydrophobic Welded Syringe Filter 0.22um with Printing.	100pcs/pk
C0000298	13mm	PTFE Hydrophobic Welded Syringe Filter 0.45um with Printing.	100pcs/pk
C0000299	25mm	PTFE Hydrophobic Welded Syringe Filter 0.22um with Printing.	100pcs/pk
C0000300	25mm	PTFE Hydrophobic Welded Syringe Filter 0.45um with Printing.	100pcs/pk
C0000574	30mm	PTFE Hydrophobic Welded Syringe Filter 0.22um with Printing.	100pcs/pk
C0000575	30mm	PTFE Hydrophobic Welded Syringe Filter 0.45um with Printing.	100pcs/pk

PVDF Hydrophobic

PVDF Hydrophilic



- Low protein-binding for filtration of non-aggressive aqueous and mild organic solutions.
- Low UV absorbing extractables and low nonspecific protein binding.
- Two types in pore size:0.22µm and 0.45µm.
- Three types in filter size:13mm, 25mm and 30mm.

- This PVDF +PP pre-filter provides two times greater throughput than standard filter without pre-filtration.
- Hydrophilic membrane with good solvent resistance.

- Sterilizing/Clarifying filtration of biological solutions.
- Excellent chemical compatibility, even with aggressive acids and alcohols.
- Filtration of samples where high protein recovery is desired.

Typical data

Material	PVDF Hydrophilic		
Material of housing	рр		
Effective filtration area(cm²)	13mm/1.13cm ²	25mm/4.15cm ²	30mm/5.2cm ²
Pore size(µm)	0.22/0.45		
Process volume(ml)	<10ml(13mm)	<100ml(25mm)	<150ml(30mm)
Maximum Operating Temperature	100°C		
Maximum Operating Pressure(psi)		87psi	













Ref.No.	Size	Description	Package
C0000289	13mm	PVDF Hydrophilic Welded Syringe Filter 0.22um with Printing.	100pcs/pk
C0000290	13mm	PVDF Hydrophilic Welded Syringe Filter 0.45um with Printing.	100pcs/pk
C0000291	25mm	PVDF Hydrophilic Welded Syringe Filter 0.22um with Printing.	100pcs/pk
C0000292	25mm	PVDF Hydrophilic Welded Syringe Filter 0.45um with Printing.	100pcs/pk
C0000571	30mm	PVDF Hydrophilic Welded Syringe Filter 0.22um with Printing.	100pcs/pk
C0000396	30mm	PVDF Hydrophilic Welded Syringe Filter 0.45um with Printing.	100pcs/pk

PVDF Hydrophobic



- Filtration of water-soluble oligomers and polymers, e.g. protein solutions.
- Filtration of hydrophobic substances in different organic solvents.
- Two types in pore size:0.22µm and 0.45µm.
- Three types in filter size:13mm, 25mm and 30mm.

- Features:
 This PVDF + PP pre-filter provides two times greater throughput than standard filter
- This membrane features stability and hydrophobic interactions which is similar to PTFE.

- Gas filtration, Vapor filtration, High-temperature filtration.
- Food industry and Medicine filtration.

Typical data

Material	PVDF Hydrophobic		
Material of housing	рр		
Effective filtration area(cm²)	13mm/1.13cm ² 25mm/4.15cm ² 30mm/5.2cm ²		
Pore size(µm)	0.22/0.45		
Process volume(ml)	<10ml(13mm)	<100ml(25mm)	<150ml(30mm)
Maximum Operating Temperature	100°C		
Maximum Operating Pressure(psi)	87psi		













Ref.No.	Size	Description	Package
C0000285	13mm	PVDF Hydrophobic Welded Syringe Filter 0.22um with Printing.	100pcs/pk
C0000286	13mm	PVDF Hydrophobic Welded Syringe Filter 0.45um with Printing.	100pcs/pk
C0000287	25mm	PVDF Hydrophobic Welded Syringe Filter 0.22um with Printing.	100pcs/pk
C0000288	25mm	PVDF Hydrophobic Welded Syringe Filter 0.45um with Printing.	100pcs/pk
C0000569	30mm	PVDF Hydrophobic Welded Syringe Filter 0.22um with Printing.	100pcs/pk
C0000570	30mm	PVDF Hydrophobic Welded Syringe Filter 0.45um with Printing.	100pcs/pk

PES

CA

CA



- CA membranes are used for tissue culture media filtration.

- Ideally suited for general filtration and biological/clinical analysis requiring maximum protein recovery.
- High temperature stability can be used with heated liquids.
- Two types in pore size:0.22µm and 0.45µm.
- Three types in filter size:13mm, 25mm and 30mm.

Features:

- This CA+PP pre-filter provides two times greater throughput than standard filter without pre-filtration. Naturally hydrophilic membrane filter.
- Low protein binding: great for protein solutions, such as protein isolation pre-filtration.
- Suitable for ground water filtration. Uniform pore size structure.

Applications:

- Filtration of liquid samples and some organic solvents.
- Cell retention and particle retention.
- Light scattering measurement. Sterilization of liquids.

Typical data

Material	CA			
Material of housing	рр			
Effective filtration area(cm²)	13mm/1.13cm ²	25mm/4.15cm ²	30mm/5.2cm ²	
Pore size(µm)	0.22/0.45			
Process volume(ml)	<10ml(13mm)	<100ml(25mm)	<150ml(30mm)	
Maximum Operating Temperature	50°C			
Maximum Operating Pressure(psi)		87psi		













Ref.No.	Size	Description	Package
C0000760	13mm	CA Welded Syringe Filter 0.22um with Printing.	100pcs/pk
C0000761	13mm	CA Welded Syringe Filter 0.45um with Printing.	100pcs/pk
C0000301	25mm	CA Welded Syringe Filter 0.22um with Printing.	100pcs/pk
C0000302	25mm	CA Welded Syringe Filter 0.45um with Printing.	100pcs/pk
C0000576	30mm	CA Welded Syringe Filter 0.22um with Printing.	100pcs/pk
C0000577	30mm	CA Welded Syringe Filter 0.45um with Printing.	100pcs/pk

PES



- High flow rates(liquids), low protein binding, low concentrations of extractable substances.
- Low-affinity for proteins and extractable with substantially faster flow rates than PVDF; suitable for pre-filtration and filtration of buffers and culture media.
- Two types in pore size:0.22µm and 0.45µm.
- Three types in filter size:13mm, 25mm and 30mm.

- Features:
 This PES+PP pre-filter provides two times greater throughput than standard filter without pre-filtration.
- Faster flow rate than PVDF.
- Excellent thermal resistance and chemical resistance.

Applications:

- PES is certified for ion chromatography; tissue culture media; filtration of proteins and nucleic acids.
- Suitable for filtration of aqueous solution with high throughput.

Typical data

Material	PES			
Material of housing	рр			
Effective filtration area(cm²)	13mm/1.13cm ² 25mm/4.15cm ² 30mm/5.2cm ²			
Pore size(µm)	0.22/0.45			
Process volume(ml)	<10ml(13mm)	<100ml(25mm)	<150ml(30mm)	
Maximum Operating Temperature	90°C			
Maximum Operating Pressure(psi)	87psi			















Ref.No.	Size	Description	Package
C0000293	13mm	PES Welded Syringe Filter 0.22um with Printing.	100pcs/pk
C0000294	13mm	PES Welded Syringe Filter 0.45um with Printing.	100pcs/pk
C0000295	25mm	PES Welded Syringe Filter 0.22um with Printing.	100pcs/pk
C0000296	25mm	PES Welded Syringe Filter 0.45um with Printing.	100pcs/pk
C0000572	30mm	PES Welded Syringe Filter 0.22um with Printing.	100pcs/pk
C0000573	30mm	PES Welded Syringe Filter 0.45um with Printing.	100pcs/pk

RC

RC



- The best option for reliable and leachable free sterilisation of liquids.
- The very low non-specific binding characteristics of this membrane makes it a perfect choice for biomolecule solutions and other dissolved substances.
- Two types in pore size:0.22µm and 0.45µm.
- Three types in filter size:13mm, 25mm.

- This RC+PP pre-filter provides two times greater throughput than standard filter without
- Outperforming chemical compatibility choose for biomolecule solutions and other dissolved substances.

Applications

- Industrial Chromatography.
- Filtration of aqueous solutions as well as organic solvents and chemicals.

Typical data

Material	RC		
Material of housing	рр		
Effective filtration area(cm²)	13mm/1.13cm²	25mm/4.15cm²	
Pore size(µm)	0.22/0.45		
Process volume(ml)	<10ml(13mm)	<100ml(25mm)	
Maximum Operating Temperature	100°C		
Maximum Operating Pressure(psi)	87psi		









Ref.No.	Size	Description	Package
C0001179	13mm	RC Welded Syringe Filter 0.22um.	100pcs/pk
C0001180	13mm	RC Welded Syringe Filter 0.45um.	100pcs/pk
C0001181	25mm	RC Welded Syringe Filter 0.22um.	100pcs/pk
C0001182	25mm	RC Welded Syringe Filter 0.45um.	100pcs/pk



7. COLORFUL SYRINGE FILTER

- Nylon / 67
- PTFE / 68-69
- PVDF / 70-71
- PES / 72
- MCE / 73
- CA / 73

Colorful Syringe Filter Nylon

Colorful Syringe Filter



Colorful Syringe Filter

- In order to meet different customers' requests, Labfil® supplies the syringe filters with outer ring as well.
- It's available in many different pore sizes and with several hydrophilic and hydrophobic membrane materials.
- More Economic.
- Reliable removal of microorganisms and particles from liquids for HPLC sample preparation.
- High mechanical and tensile strength.

HOW TO CHOOSE FILTER SIZE



0-10ml Sample Volume Use 13mm

Syringe Filter



10-100ml Sample Volume Use 25mm Syringe Filter



10-150ml Sample Volume Use 33mm Syringe Filter



Female Luer Lock Inlet



Male Luer Slip Outlet

Unique Threaded Interface Design

MEMBRANE FILTER POLYMER SEI











Gas, Air, and Solvent filtration

general laboratory filtration.

General filtrationsterilization, HPLC sample prep

Used for clarification of aqueous solutions and

HPLC sample preparation and General filtration

Used for aqueous samples containing proteins,

or similar large organic molecules biomolecule solution.

Ion chromatography certified, tissue culture filtered, and can filter proteins and nucleic acids.



lon	PES	PTFE	MCE	PVDF	CA

Nylon	Good chemical compatibility and very low extractables
PES	High flow rate with good throughput, low protein binding, can be used in high temperature liquids, in inorganic extractable ions.
PTFE	Compatible with strong acids and aggressive solvents
MCE	High flow rate and high throughput. High-protein binding. Excellent biocompatibility.
PVDF	Good flow rate characteristics. Ideal for chromatography applications
CA	Extra low non-specific binding. High recovery.

Nylon



- High mechanical and tensile strength.
- Universal application for analytical procedures.
- Two types in pore size:0.22µm and 0.45µm.
- Three types in filter size:13mm, 25mm and 33mm.

- One of the most commonly used membranes.
- Broad compatibility with aqueous and organic solvents, with stable hydrophilicity, not suitable for highly acidic samples.

- Used for most organic solvents mixtures and mid-polar liquids.
- Chemical filtration and Beverage filtration.
- Note: Nylon binds protein, do not use when high protein recovery is desired.

Typical data

Material	Nylon		
Material of housing	рр		
Effective filtration area(cm²)	13mm/1.13cm ²	25mm/4.15cm ²	33mm/5.2cm ²
Pore size(µm)		0.22/0.45	
Process volume(ml)	<10ml(13mm)	<100ml(25mm)	<150ml(33mm)
Maximum Operating Temperature		100°C	
Maximum Operating Pressure(psi)	87psi		













Ref.No.	Size	Description	Package
C0000638	13mm	Nylon Syringe Filter 0.22um with Outer Ring and Printing.	100pcs/pk
C0000639	13mm	Nylon Syringe Filter 0.45um with Outer Ring and Printing.	100pcs/pk
C0000640	25mm	Nylon Syringe Filter 0.22um with Outer Ring and Printing.	100pcs/pk
C0000641	25mm	Nylon Syringe Filter 0.45um with Outer Ring and Printing.	100pcs/pk
C0000662	33mm	Nylon Syringe Filter 0.22um with Outer Ring and Printing.	100pcs/pk
C0000663	33mm	Nylon Syringe Filter 0.45um with Outer Ring and Printing.	100pcs/pk

PTFE Hydrophobic

PTFE Hydrophobic



- Hydrophobic PTFE syringe filters have broad chemical compatibility and high pH resistance.
- Versatile filters for use with aggressive organic solvent-based solutions and are especially ideal for HPLC sample preparation.
- Two types in pore size:0.22µm and 0.45µm.
- Three types in filter size:13mm, 25mm and 33mm.

Features:

- Hydrophobic PTFE membrane has great temperature resistance.
- Suitable for Solvents/Gases/Acids/Bases.
- Excellent chemical compatibility for filtering harsh chemicals that destroy other membrane materials and ideal for aerosol sampling.

Applications:

- Degassing/Clarifying aqueous samples.
- Removal of protein precipitates.
- Strong acid solvent filtration and Alkali solvent filtration.
- Biofuel analys

Typical data

Material	PTFE Hydrophobic		
Material of housing	рр		
Effective filtration area(cm²)	13mm/1.13cm ²	25mm/4.15cm ²	33mm/5.2cm ²
Pore size(µm)		0.22/0.45	
Process volume(ml)	<10ml(13mm)	<100ml(25mm)	<150ml(33mm)
Maximum Operating Temperature		130°C	
Maximum Operating Pressure(psi)	87psi		













Ref.No.	Size	Description	Package
C0000646	13mm	PTFE Hydrophobic Syringe Filter 0.22um with Outer Ring and Printing.	100pcs/pk
C0000647	13mm	PTFE Hydrophobic Syringe Filter 0.45um with Outer Ring and Printing.	100pcs/pk
C0000648	25mm	PTFE Hydrophobic Syringe Filter 0.22um with Outer Ring and Printing.	100pcs/pk
C0000649	25mm	PTFE Hydrophobic Syringe Filter 0.45um with Outer Ring and Printing.	100pcs/pk
C0000667	33mm	PTFE Hydrophobic Syringe Filter 0.22um with Outer Ring and Printing.	100pcs/pk
C0000666	33mm	PTFE Hydrophobic Syringe Filter 0.45um with Outer Ring and Printing.	100pcs/pk

PTFE Hydrophilic



- Hydrophilic materials are obtained through process improvement.
- Hydrophilic material has a great affinity for water and it's easily wetted by water because of the surface with water molecules to form intermolecular focus.
- High mechanical and tensile strength.
- Used for most organic solvents and mid-polar liquids.
- Two types in pore size:0.22µm and 0.45µm.
- Three types in filter size:13mm, 25mm and 33mm.

Features:

- Broad chemical compatibility choose for filtering aqueous and organic solutions low protein binding.
- Low IC extractables.

Applications:

- Industrial Chromatography.
- Filtration of aqueous solutions as well as organic solvents and chemicals.

Typical data

Material			
Material of housing	рр		
Effective filtration area(cm²)	13mm/1.13cm ²	25mm/4.15cm ²	33mm/5.2cm ²
Pore size(µm)		0.22/0.45	
Process volume(ml)	<10ml(13mm)	<100ml(25mm)	<150ml(33mm)
Maximum Operating Temperature		130°C	
Maximum Operating Pressure(psi)	87psi		













PTFE Hydrophilic

Ref.No.	Size	Description	Package
C0000642	13mm	PTFE Hydrophilic Syringe Filter 0.22um with Outer Ring and Printing.	100pcs/pk
C0000643	13mm	PTFE Hydrophilic Syringe Filter 0.45um with Outer Ring and Printing.	100pcs/pk
C0000644	25mm	PTFE Hydrophilic Syringe Filter 0.22um with Outer Ring and Printing.	100pcs/pk
C0000645	25mm	PTFE Hydrophilic Syringe Filter 0.45um with Outer Ring and Printing.	100pcs/pk
C0000664	33mm	PTFE Hydrophilic Syringe Filter 0.22um with Outer Ring and Printing.	100pcs/pk
C0000665	33mm	PTFE Hydrophilic Syringe Filter 0.45um with Outer Ring and Printing.	100pcs/pk

PVDF Hydrophilic



- Filtration of water-soluble oligomers and polymers, e.g. protein solutions.
- Filtration of hydrophobic substances in different organic solvents.
- Two types in pore size:0.22µm and 0.45µm.
- Three types in filter size:13mm, 25mm and 33mm.

- This membrane features stability and hydrophobic interactions which is similar to PTFE.
- Naturally hydrophobic membrane provides excellent flow rates and high loading.
- Exceptional temperature stability provides extended sampling range over other membranes.

- Gas filtration, Vapor filtration, High-temperature filtration.
- Food industry and Medicine filtration.

Typical data

Material	PVDF Hydrophobic			
Material of housing	рр			
Effective filtration area(cm²)	13mm/1.13cm ² 25mm/4.15cm ² 33mm/5.2cm ²			
Pore size(µm)		0.22/0.45		
Process volume(ml)	<10ml(13mm)	<100ml(25mm)	<150ml(33mm)	
Maximum Operating Temperature	100°C			
Maximum Operating Pressure(psi)		87psi		













Ref.No.	Size	Description	Package
C0000654	13mm	PVDF Hydrophobic Syringe Filter 0.22um with Outer Ring and Printing.	100pcs/pk
C0000655	13mm	PVDF Hydrophobic Syringe Filter 0.45um with Outer Ring and Printing.	100pcs/pk
C0000656	25mm	PVDF Hydrophobic Syringe Filter 0.22um with Outer Ring and Printing.	100pcs/pk
C0000657	25mm	PVDF Hydrophobic Syringe Filter 0.45um with Outer Ring and Printing.	100pcs/pk
C0000670	33mm	PVDF Hydrophobic Syringe Filter 0.22um with Outer Ring and Printing.	100pcs/pk
C0000671	33mm	PVDF Hydrophobic Syringe Filter 0.45um with Outer Ring and Printing.	100pcs/pk

PVDF Hydrophilic



- Hydrophilic materials are obtained through process improvement.
- Hydrophilic material has a great affinity for water and it's easily wetted by water because of the surface with water molecules to form intermolecular focus.
- Low protein-binding for filtration of non-aggressive aqueous and mild organic solutions.
- Low UV absorbing extractables and low nonspecific protein binding.
- Two types in pore size:0.22µm and 0.45µm.
- Three types in filter size:13mm, 25mm and 33mm.

- Hydrophilic membrane with good solvent resistance.
- It has superior performance to prevent leak of sample solvent and can promise membrane area being used in a large filtration area.

Applications:

- Sterilizing/Clarifying filtration of biological solutions.
- Excellent chemical compatibility, even with aggressive acids and alcohols.
- Filtration of samples where high protein recovery is desired.

Typical data

Material	PVDF Hydrophilic		
Material of housing	рр		
Effective filtration area(cm²)	13mm/1.13cm ²	25mm/4.15cm ²	33mm/5.2cm ²
Pore size(µm)		0.22/0.45	
Process volume(ml)	<10ml(13mm)	<100ml(25mm)	<150ml(33mm)
Maximum Operating Temperature		100°C	
Maximum Operating Pressure(psi)		87psi	













Ref.No.	Size	Description	Package
C0000650	13mm	PVDF Hydrophilic Syringe Filter 0.22um with Outer Ring and Printing.	100pcs/pk
C0000651	13mm	PVDF Hydrophilic Syringe Filter 0.45um with Outer Ring and Printing.	100pcs/pk
C0000652	25mm	PVDF Hydrophilic Syringe Filter 0.22um with Outer Ring and Printing.	100pcs/pk
C0000653	25mm	PVDF Hydrophilic Syringe Filter 0.45um with Outer Ring and Printing.	100pcs/pk
C0000668	33mm	PVDF Hydrophilic Syringe Filter 0.22um with Outer Ring and Printing.	100pcs/pk
C0000669	33mm	PVDF Hydrophilic Syringe Filter 0.45um with Outer Ring and Printing.	100pcs/pk

MCE/CA

PES

PES



- High mechanical and tensile strength.
- Used for most organic solvents and mid-polar liquids.
- Two types in pore size:0.22µm and 0.45µm.
- Three types in filter size:13mm, 25mm and 33mm.

- Excellent thermal resistance and chemical resistance.
- Having high flow rates thanks to their symmetric structure.
- A low protein adsorption, is recommended for filtration of protein filtration as well as
- The low level extractables make them suitable for environmental analysis.

- PES is certified by ion chromatography; tissue culture media; filtration
- of proteins and nucleic acids.
- Suitable for filtration of aqueous solution with high throughput.

Typical data

Material	PES		
Material of housing	рр		
Effective filtration area(cm²)	13mm/1.13cm ² 25mm/4.15cm ² 33mm/5.2cm		33mm/5.2cm ²
Pore size(µm)		0.22/0.45	
Process volume(ml)	<10ml(13mm) <100ml(25mm) <150ml(33		<150ml(33mm)
Maximum Operating Temperature	90°C		
Maximum Operating Pressure(psi)		87psi	













Ref.No.	Size	Description	Package
C0000658	13mm	PES Syringe Filter 0.22um with Outer Ring and Printing.	100pcs/pk
C0000659	13mm	PES Syringe Filter 0.45um with Outer Ring and Printing.	100pcs/pk
C0000660	25mm	PES Syringe Filter 0.22um with Outer Ring and Printing.	100pcs/pk
C0000661	25mm	PES Syringe Filter 0.45um with Outer Ring and Printing.	100pcs/pk
C0000672	33mm	PES Syringe Filter 0.22um with Outer Ring and Printing.	100pcs/pk
C0000673	33mm	PES Syringe Filter 0.45um with Outer Ring and Printing.	100pcs/pk

MCE/CA



- Biologically inert mixtures of cellulose acetate and cellulose nitrate.
- Membranes in analytical and research applications.
- Two types in pore size:0.22µm and 0.45µm.
- Three types in filter size:13mm, 25mm.

Features:

- Ideal for capturing and culturing microorganisms in the Water and wastewater industry.
- Used to determine particulate contamination of lubricating oil and hydraulic fluid in patch test kits.
- Compatible with gamma irradiation.

Applications:

- Appropriate for bacterial culturing, including E. coli culturing.
- Biologically inert with good thermal stability.
- Uniform microporous structure results in high flow rates when used for filtering.

Typical data

Material	MCE/CA		
Material of housing	pp		
Effective filtration area(cm²)	13mm/1.13cm ²	25mm/4.15cm ²	33mm/5.2cm ²
Pore size(µm)		0.22/0.45	
Process volume(ml)	<10ml(13mm)	<100ml(25mm)	<150ml(33mm)
Maximum Operating Temperature		50°C	
Maximum Operating Pressure(psi)		87psi	



Ref.No.	Size	Description	Package
C0001239	13mm	MCE Syringe Filter 0.22um with Outer Ring and Printing.	100pcs/pk
C0001240	13mm	MCE Syringe Filter 0.45um with Outer Ring and Printing.	100pcs/pk
C0001241	25mm	MCE Syringe Filter 0.22um with Outer Ring and Printing.	100pcs/pk
C0001242	25mm	MCE Syringe Filter 0.45um with Outer Ring and Printing.	100pcs/pk
C0000780	13mm	CA Syringe Filter 0.22um with Outer Ring and Printing.	100pcs/pk
C0000781	13mm	CA Syringe Filter 0.45um with Outer Ring and Printing.	100pcs/pk
C0000782	25mm	CA Syringe Filter 0.22um with Outer Ring and Printing.	100pcs/pk
C0000783	25mm	CA Syringe Filter 0.45um with Outer Ring and Printing.	100pcs/pk





8. STERILE SYRINGE FILTER

STERILE WELDED SYRINGE FILTER

- Nylon/ 75
- PES/ 75
- PTFE/ 77
- PVDF/ 77

STERILE ECONOMY SYRINGE FILTER

- Nylon/ 78
- PES/ 78
- PTFE/ 79
- PVDF/80

Sterile Welded Syringe Filter



Nylon

- 100% integrity tested.
- Individually packaged.
- Ideal for sterile filtration.
- Low extractables, high protein binding; recommended for alcohols and

PES

- For medical use, sterile filtering protein solution, tissue culture media, additives.

Nylon











Ref.No.	Size	Description	Package
C0000484	13mm	Sterile Nylon Welded Syringe Filter 0.22um with Printing.	100pcs/pk
C0000485	13mm	Sterile Nylon Welded Syringe Filter 0.45um with Printing.	100pcs/pk
C0000486	25mm	Sterile Nylon Welded Syringe Filter 0.22um with Printing.	50pcs/pk
C0000487	25mm	Sterile Nylon Welded Syringe Filter 0.45um with Printing.	50pcs/pk
C0000510	30mm	Sterile Nylon Welded Syringe Filter 0.22um with Printing.	50pcs/pk
C0000511	30mm	Sterile Nylon Welded Syringe Filter 0.45um with Printing.	50pcs/pk

PES











Ref.No.	Size	Description	Package
C0000500	13mm	Sterile PES Welded Syringe Filter 0.22um with Printing.	100pcs/pk
C0000501	13mm	Sterile PES Welded Syringe Filter 0.45um with Printing.	100pcs/pk
C0000502	25mm	Sterile PES Welded Syringe Filter 0.22um with Printing.	50pcs/pk
C0000503	25mm	Sterile PES Welded Syringe Filter 0.45um with Printing.	50pcs/pk
C0000518	30mm	Sterile PES Welded Syringe Filter 0.22um with Printing.	50pcs/pk
C0000519	30mm	Sterile PES Welded Syringe Filter 0.45um with Printing.	50pcs/pk



PTFE

- 100% integrity tested.
- Individually packaged.
- Ideal for sterile filtration.
- For degassing/clarifying aqueous and solvent samples.

PTFE Hydrophilic













Ref.No.	Size	Description	Package
C0000488	13mm	Sterile PTFE Hydrophilic Welded Syringe Filter 0.22um with Printing.	100pcs/pk
C0000489	13mm	Sterile PTFE Hydrophilic Welded Syringe Filter 0.45um with Printing.	100pcs/pk
C0000490	25mm	Sterile PTFE Hydrophilic Welded Syringe Filter 0.22um with Printing.	50pcs/pk
C0000491	25mm	Sterile PTFE Hydrophilic Welded Syringe Filter 0.45um with Printing.	50pcs/pk
C0000512	30mm	Sterile PTFE Hydrophilic Welded Syringe Filter 0.22um with Printing.	50pcs/pk
C0000513	30mm	Sterile PTFE Hydrophilic Welded Syringe Filter 0.45um with Printing.	50pcs/pk

PTFE Hydrophobic













Ref.No.	Size	Description	Package
C0000504	13mm	Sterile PTFE Hydrophobic Welded Syringe Filter 0.22um with Printing.	100pcs/pk
C0000505	13mm	Sterile PTFE Hydrophobic Welded Syringe Filter 0.45um with Printing.	100pcs/pk
C0000506	25mm	Sterile PTFE Hydrophobic Welded Syringe Filter 0.22um with Printing.	50pcs/pk
C0000507	25mm	Sterile PTFE Hydrophobic Welded Syringe Filter 0.45um with Printing.	50pcs/pk
C0000520	30mm	Sterile PTFE Hydrophobic Welded Syringe Filter 0.22um with Printing.	50pcs/pk
C0000521	30mm	Sterile PTFE Hydrophobic Welded Syringe Filter 0.45um with Printing.	50pcs/pk

Sterile PVDF Welded Syringe Filter



PVDF

- 100% integrity tested.
- Individually packaged.
- For sterilization/clarification of water, buffers, and salt solutions.

PVDF Hydrophilic













Ref.No.	Size	Description	Package
C0000496	13mm	Sterile PVDF Hydrophilic Welded Syringe Filter 0.22um with Printing.	100pcs/pk
C0000497	13mm	Sterile PVDF Hydrophilic Welded Syringe Filter 0.45um with Printing.	100pcs/pk
C0000498	25mm	Sterile PVDF Hydrophilic Welded Syringe Filter 0.22um with Printing.	50pcs/pk
C0000499	25mm	Sterile PVDF Hydrophilic Welded Syringe Filter 0.45um with Printing.	50pcs/pk
C0000516	30mm	Sterile PVDF Hydrophilic Welded Syringe Filter 0.22um with Printing.	50pcs/pk
C0000517	30mm	Sterile PVDF Hydrophilic Welded Syringe Filter 0.45um with Printing.	50pcs/pk

PVDF Hydrophobic













Ref.No.	Size	Description	Package
C0000492	13mm	Sterile PVDF Hydrophobic Welded Syringe Filter 0.22um with Printing.	100pcs/pk
C0000493	13mm	Sterile PVDF Hydrophobic Welded Syringe Filter 0.45um with Printing.	100pcs/pk
C0000494	25mm	Sterile PVDF Hydrophobic Welded Syringe Filter 0.22um with Printing.	50pcs/pk
C0000495	25mm	Sterile PVDF Hydrophobic Welded Syringe Filter 0.45um with Printing.	50pcs/pk
C0000514	30mm	Sterile PVDF Hydrophobic Welded Syringe Filter 0.22um with Printing.	50pcs/pk
C0000515	30mm	Sterile PVDF Hydrophobic Welded Syringe Filter 0.45um with Printing.	50pcs/pk



Nylon

- 100% integrity tested.
- Individually packaged.
- Ideal for sterile filtration.
- Low extractables; high protein binding; recommended for alcohols and weak solvents.

PES

- For medical use, sterile filtering protein solution, tissue culture media, additives.

Nylon











Ref.No.	Size	Description	Package
C0000524	13mm	Sterile Nylon Syringe Filter 0.22um with Outer Ring.	100pcs/pk
C0000525	13mm	Sterile Nylon Syringe Filter 0.45um with Outer Ring.	100pcs/pk
C0000526	25mm	Sterile Nylon Syringe Filter 0.22um with Outer Ring.	50pcs/pk
C0000527	25mm	Sterile Nylon Syringe Filter 0.45um with Outer Ring.	50pcs/pk
C0000548	33mm	Sterile Nylon Syringe Filter 0.22um with Outer Ring.	50pcs/pk
C0000549	33mm	Sterile Nylon Syringe Filter 0.45um with Outer Ring.	50pcs/pk

PES













Ref.No.	Size	Description	Package
C0000544	13mm	Sterile PES Syringe Filter 0.22um with Outer Ring.	100pcs/pk
C0000545	13mm	Sterile PES Syringe Filter 0.45um with Outer Ring.	100pcs/pk
C0000546	25mm	Sterile PES Syringe Filter 0.22um with Outer Ring.	50pcs/pk
C0000547	25mm	Sterile PES Syringe Filter 0.45um with Outer Ring.	50pcs/pk
C0000558	33mm	Sterile PES Syringe Filter 0.22um with Outer Ring.	50pcs/pk
C0000559	33mm	Sterile PES Syringe Filter 0.45um with Outer Ring.	50pcs/pk

Sterile Colorful PTFE Syringe Filter



PTFE

- 100% integrity tested.
- Individually packaged.
- Ideal for sterile filtration.
- For degassing/clarifying aqueous and solvent samples.

PTFE Hydrophilic













Ref.No.	Size	Description	Package
C0000528	13mm	Sterile PTFE Hydrophilic Syringe Filter 0.22um with Outer Ring.	100pcs/pk
C0000529	13mm	Sterile PTFE Hydrophilic Syringe Filter 0.45um with Outer Ring.	100pcs/pk
C0000530	25mm	Sterile PTFE Hydrophilic Syringe Filter 0.22um with Outer Ring.	50pcs/pk
C0000531	25mm	Sterile PTFE Hydrophilic Syringe Filter 0.45um with Outer Ring.	50pcs/pk
C0000550	33mm	Sterile PTFE Hydrophilic Syringe Filter 0.22um with Outer Ring.	50pcs/pk
C0000551	33mm	Sterile PTFE Hydrophilic Syringe Filter 0.45um with Outer Ring.	50pcs/pk

PTFE Hydrophobic













Ref.No.	Size	Description	Package
C0000532	13mm	Sterile PTFE Hydrophobic Syringe Filter 0.22um with Outer Ring.	100pcs/pk
C0000533	13mm	Sterile PTFE HydrophobicSyringe Filter 0.45um with Outer Ring.	100pcs/pk
C0000534	25mm	Sterile PTFE Hydrophobic Syringe Filter 0.22um with Outer Ring.	50pcs/pk
C0000535	25mm	Sterile PTFE Hydrophobic Syringe Filter 0.45um with Outer Ring.	50pcs/pk
C0000553	33mm	Sterile PTFE Hydrophobic Syringe Filter 0.22um with Outer Ring.	50pcs/pk
C0000552	33mm	Sterile PTFE Hydrophobic Syringe Filter 0.45um with Outer Ring.	50pcs/pk

Sterile Colorful PVDF Syringe Filter

PVDF Hydrophilic





PVDF

- 100% integrity tested.

- Individually packaged.





- For sterilization/clarification of water, buffers, and salt solutions.



Ref.No.	Size	Description	Package
C0000536	13mm	Sterile PVDF Hydrophilic Syringe Filter 0.22um with Outer Ring.	100pcs/pk
C0000537	13mm	Sterile PVDF Hydrophilic Syringe Filter 0.45um with Outer Ring.	100pcs/pk
C0000538	25mm	Sterile PVDF Hydrophilic Syringe Filter 0.22um with Outer Ring.	50pcs/pk
C0000539	25mm	Sterile PVDF Hydrophilic Syringe Filter 0.45um with Outer Ring.	50pcs/pk
C0000554	33mm	Sterile PVDF Hydrophilic Syringe Filter 0.22um with Outer Ring.	50pcs/pk
C0000555	33mm	Sterile PVDF Hydrophilic Syringe Filter 0.45um with Outer Ring.	50pcs/pk

PVDF Hydrophobic













Ref.No.	Size	Description	Package
C0000540	13mm	Sterile PVDF Hydrophobic Welded Syringe Filter 0.22um with Printing.	100pcs/pk
C0000541	13mm	Sterile PVDF Hydrophobic Welded Syringe Filter 0.45um with Printing.	100pcs/pk
C0000542	25mm	Sterile PVDF Hydrophobic Welded Syringe Filter 0.22um with Printing.	50pcs/pk
C0000543	25mm	Sterile PVDF Hydrophobic Welded Syringe Filter 0.45um with Printing.	50pcs/pk
C0000556	33mm	Sterile PVDF Hydrophobic Welded Syringe Filter 0.22um with Printing.	50pcs/pk
C0000557	33mm	Sterile PVDF Hydrophobic Welded Syringe Filter 0.45um with Printing.	50pcs/pk

Laboratory Syringe



Laboratory Syringe

- Made of high quality PP material with good chemical resistance.
- All batches of this product are produced in an ISO 9001 compliant clean
- Additionally, all syringes are designed to match with ALWSCI syringe filters, and they can also be used with ALWSCI vials.

Syringe Filter Usage Guide

Step 1: Transfer Sample

Draw the liquid sample into the syringe, being cautious not to exceed the syringe's maximum volume to prevent overflow or excessive pressure buildup.

Step 2: Filter Sample

Attach the syringe filter to the tip of the syringe. Gently and steadily depress the plunger to pass the sample through the syringe filter. Apply uniform pressure to avoid filter damage or sample ejection.


Step 3: Collect Sample


As the sample is filtered, the filtrate will be collected in a receptacle positioned below the filter unit. Ensure the collection vessel is of adequate size to capture the entire filtered volume.

*Key Considerations:

Verify the compatibility of the filter material with the sample solution prior to filtration. Avoid introducing air into the filter to prevent foaming of the sample or damage to the filter.

Once filtration is complete, dispose of the used syringe filter and syringe according to laboratory safety and sanitation protocols.













Ref.No.	Description	Package
C0001749	2mL Disposable HPLC Laboratory syringe.	100pcs/pk
C0001750	5mL Disposable HPLC Laboratory syringe.	100pcs/pk
C0001751	10mL Disposable HPLC Laboratory syringe.	100pcs/pk
C0001752	20mL Disposable HPLC Laboratory syringe.	100pcs/pk

Membrane Filter

Membrane Filter



Membrane Filter

- Membrane filters or "membranes" are polymer films with specific pore
- Membranes retain particles and microorganisms that exceed their pore ratings by acting as a physical barrier and capturing such particles on the surface of the membrane.
- Labfil® membranes are available in a variety of polymers, pore sizes, diameters, and surface types.
- Biologically inert mixtures of cellulose acetate and cellulose nitrate have made sterile MCE membrane filters one of the most widely used membranes in analytical and research applications.










Features:

- Ideal for capturing and culturing microorganisms in the Water and wastewater industry.
- Used to determine particulate contamination of lubricating oil and hydraulic fluid in patch test kits.
- Available in pore sizes 0.22um and 0.45um, colored black, with a gridded surface.
- Compatible with gamma irradiation.











Ref.No.	Description	Package
C0000303	47mm Nylon Membrane 0.22um.	100pcs/pk
C0000305	47mm Nylon Membrane 0.45um.	100pcs/pk
C0001874	47mm Nylon Membrane 0.22um.	50pcs/pk
C0001244	47mm Sterile MCE Grid Membrane White Membrane/Black 0.22um.	100pcs/pk
C0001243	47mm Sterile MCE Grid Membrane White Membrane/Black 0.45um.	100pcs/pk

Membrane Filter

- Membrane filters or "membranes" are polymer films with specific pore ratings.
- Membranes retain particles and microorganisms that exceed their pore ratings by acting as a physical barrier and capturing such particles on the surface of the membrane.
- Labfil membranes are available in a variety of polymers, pore sizes, diameters, and surface types.

Image	Туре	Dimension(mm)	Pore Size	Item No.	Packing		
			/5	0.22µm	C0000875	100-22/-1-	
200,000		47mm	0.45µm	C0000876	100pcs/pk		
0000	CA		0.22µm	C0000877	100 / /		
0.000		90mm	0.45µm	C0000878	100pcs/pk		
A 13.6			0.22µm	C0000311	100 / 1		
1000		47mm	0.45µm	C0000313	100pcs/pk		
	MCE		0.22µm	C0000312	100 / 1		
2500		90mm	0.45µm	C0000314	100pcs/pk		
			0.22µm	C0000891	100 / 1		
		47mm	0.45µm	C0000892	100pcs/pk		
	PES		0.22µm	C0000893	100 / 1		
		90mm	0.45µm	C0000894	100pcs/pk		
SZOJKZEWAZU:			0.22µm	C0000303			
	Nylon		0.45µm	C0000305	100pcs/pk		
			0.22µm	C0000304	100 (1)		
			90mm	0.45µm	C0000306	100pcs/pk	
	PVDF(Hydrophilic)		02.0		0.22µm	C0000909	100 / 1
		47mm	0.45µm	C0000563	100pcs/pk		
20.30			0.22µm	C0000910			
150		Ž.	90mm	0.45µm	C0000911	100pcs/pk	
\$15-27-41.36E	10 m		0.22µm	C0000916	100 / 1		
		47mm	0.45µm	C0000917	100pcs/pk		
	PVDF(Hydrophobic)		0.22µm	C0000918	100 / /		
	90mm	90mm	0.45µm	C0000919	100pcs/pk		
8/28/27/2			0.22µm	C0000424			
		47mm	0.45µm	C0000425	100pcs/pk		
	PTFE(Hydrophilic)		0.22µm	C0000899			
	90mm	90mm	0.45µm	C0000900	100pcs/pk		
			0.22µm	C0000307			
	47mm	47mm	0.45µm	C0000309	100pcs/pk		
	PTFE(Hydrophobic)		0.22µm	C0000308			
	90mm	90mm	0.45µm	C0000310	100pcs/pk		


10 Membrane

Chemical Compatibility

C=Compat	ibility LC=Limited Compatibility	IC=Incom	patibility	ND=No Data	at presen
	Chemical	Nylon	PTFE	PVDF	PES
	acetic acid 25%	С	С	С	С
	hydrochloric acid 25%	IC	С	С	С
	Sulfuric acid,25%	IC	С	С	С
ACIDS	Nitric acid,25%	IC	С	С	С
	Phosphoric acid,25%	IC	С	ND	ND
	Formic acid,25%	IC	С	ND	ND
	trichloroacetic acid,10%	IC	С	ND	ND
	Methyl alcohol,98%	С	С	С	С
	ethyl alcohol,70%	LC	С	С	С
Aleebel	Isopropyl alcohol	С	С	С	С
Alcohol	Butanol	С	С	С	С
	benzyl alcohol	С	С	С	ND
	glycerinum	С	С	С	С
	Triethanolamine	С	С	ND	ND
Acid	Aniline	ND	С	ND	ND
amides	Pyridine	С	С	IC	IC
	Acetonitrile	С	С	С	LC
	Ethyl acetate	С	С	С	IC
	N-butyl acetate	С	С	IC	IC
Linid	Propyl acetate	С	С	IC	IC
Lipid	Cellosolve acetate	ND	С	ND	IC
	Methyl Cellosolve	ND	С	ND	IC
	Isopropyl myristate	С	С	ND	IC
	Acetone	С	С	IC	IC
V-4	Cyclohexanone	С	С	IC	IC
Ketone	Methyl ethyl ketone	С	С	LC	IC
	Methyl-Isobutyl Ketone	ND	С	LC	IC
	Dioxane	С	С	LC	IC
Organic	Tetrahydrofuran	С	С	LC	IC
Peroxide	Dimethyl sulfoxide	С	С	IC	IC
	Isopropyl ether	ND	С	С	С
	Phenol solution,10%	ND	С	LC	IC
	Formaldehyde Solution,30%	С	С	С	С
Sundry	Hydrogen Peroxide	С	С	ND	ND
	Silicone oil	ND	С	С	С

Selection Guide

Better Your Chromatography Consumables.



ALWSCI Main Products:

- Analysis: Autosampler Vials & Closures.
- Storage: Sample Vials & Closures.

Selection Guide:

- Proper septa selection is critical to prevent contamination and avoid damage to the needle and instrument.
- The right choice of septa depends on the application.
- For highly sensitive samples, we recommend PTFE-lined Silicone septa, because the PTFE layer has good chemical resistance.
- Besides, septa made of different materials have different safety temperature resistance.

► Septa Selection Guide

Materials	Safety Temperature
PTFE/Silicone	180°C
PTFE/Silicone/PTFE	200°C
Red Rubber/PTFE	-40°C to 110°C
Natural Rubber/TEF Butyl/PTFE	-40°C to 120°C
PE	-20°C to 80°C

► Cap Selection Guide

Materials	Safety Temperature
PP Cap	-20°C to 100°C
Aluminum Cap	-60°C to 300°C
Phenolic Cap	-20°C to 140°C
PC Cap	-50°C to 160°C